


LS441 Wedge

Wallmount




Specifications

Lamp source	35W max MR16 IRC (GU5.3 low voltage lamp)
LS441	35W max MR16 (GU10 line voltage lamp)
UL classification	Suitable for wet locations
IP rating	IP65
Construction	LM20 diecast marine grade powdercoated aluminum
Installation type	Wall mount
Standard inclusions	Thermal cutout Toughened frosted glass lens
Ambient operating temperature	-4°F to 122°F (-20°C to +50°C)
Warranty	2 year structural, 1 year electrical
Accessories	LS6050 Mounting plate for 4in J-Box <i>Order separately</i> LSTE4 Integral transformer
Photometrics	Refer to www.lumascap.com
Surface temperature	HumanTouch™ compliant
≤ 149°F (≤ 65°C)	20W max MR16 2 x 20W max MR16

Any luminaire can become hot - take care with appropriate use and placement




LS441 Wedge

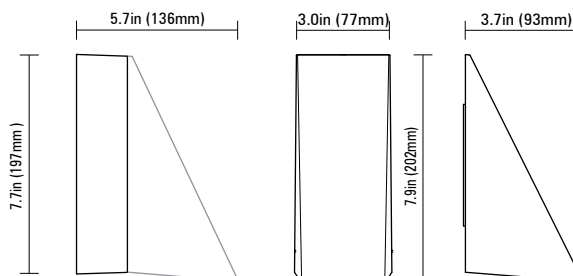

LS441A and LSTE4
Integral Transformer

LS441

PRODUCT	Code	LAMP	WATTAGE	BASE	VOLTAGE	Code	FINISH	Code
Wedge	LS441	MR16	35W IRC max	GU5.3	12V	8	Black	CB
			35W max	GU10	120V 60Hz	4	White	CW
								Silver

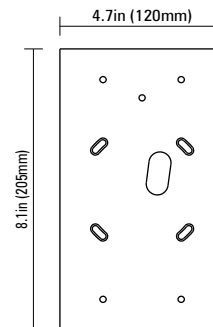

LS6050
Mounting Plate
4in J-Box