



NO POWER TOOLS



DO NOT USE SILICONE ON OUTSIDE SURFACE



KEEP ELECTRONICS FREE FROM DIRT AND MOISTURE



DO NOT HOSE OR PREASSURE CLEAN

**MODEL** LS411COB

**INSTALLATION TYPE** Type A - Surface Mount

**IP RATING** IP67

**SUPPLY VOLTAGE** 110-277 V AC, 50/60 Hz

**INSTRUCTIONS COVER** Single Colour  
 Single Colour Dimming

## LS411COB Omnio Mini

Warranty void if not installed as per installation instructions

### WARNING

It is strongly recommended to use Lumascope transformer

Install in accordance with National Electric Code, ANSI/NFPA 70 or the Canadian Electrical Code, Part I (CEC), CSA C22.1

#### 1 Supply Cable

Connect to a suitable power source in accordance with local wiring rules. Refer to diagram overleaf for conductor colour and designation.

#### 2 & 3 Mounting Screws & Base

Screw to mounting surface - Surface Mount (Type A) or attach to appropriate mounting accessory - Adaptor Base (Type B).

#### 4 Protective Sleeve


Peel back silicone protective sleeve to access screws underneath. Place protective sleeve back into correct position to cover screws after they have been tightened.

#### 5 Luminaire Rotation

Aim the Luminaire as desired and tighten screws to lock luminaire rotation. These screws also attach the luminaire body to the Adaptor Base.

#### 6 Luminaire Tilt

Aim the Luminaire as desired and tighten this screw to lock luminaire tilt.

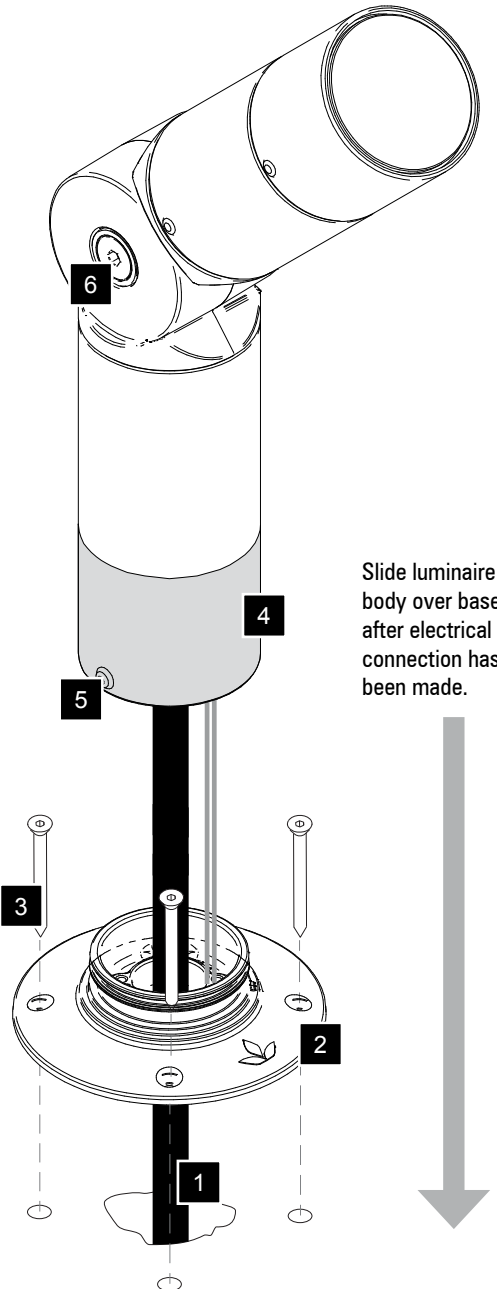

Slide luminaire body over base after electrical connection has been made.

#### Surface Mount (Type A)

For direct mounting to a flat surface


Should you experience any difficulty, please contact Lumascope directly: phone (866) 695-5862 or email [info@lumascope.com](mailto:info@lumascope.com)

**IF IN DOUBT, PLEASE CALL**

[www.lumascope.com](http://www.lumascope.com)

# Wiring Diagrams

## Line Voltage

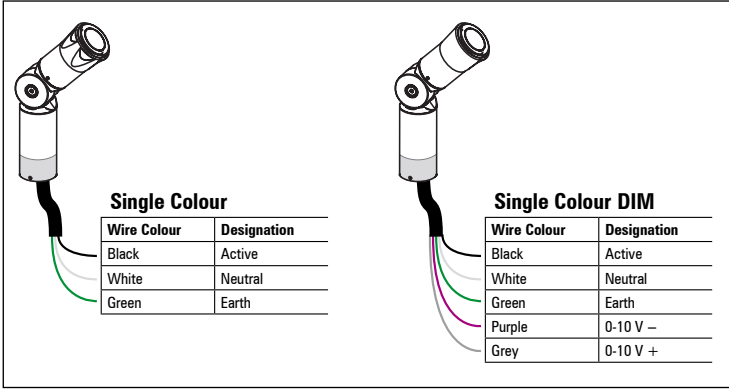

Should you experience any difficulty, please contact Lumascope directly: phone (866) 695-5862 or email [info@lumascope.com](mailto:info@lumascope.com)

**IF IN DOUBT, PLEASE CALL**

[www.lumascope.com](http://www.lumascope.com)

Copyright ©2016 LUMASCOPE USA INC.

IN0162USWallmount - 28September2016