

LS192-1A Grevillea LS192-2A Double Grevillea

At Grade



The LS192A is a low voltage spike mount luminaire delivering light in a controlled manner, with a choice of one or two adjustable light heads to direct the light where needed. It is constructed of copper or powder coated aluminum. The proprietary heat shield is unique to Lumascape and draws heat away from the lamp, extending the lamp life. This model is ideal for illuminating low level plantings or objects of interest in a landscape.

Specifications

<b>Lamp Source</b> LS192-1A	20 W max MR16 IRC (GU5.3)
<b>Lamp Source</b> LS192-2A	2 x 20 W max MR16 IRC (GU5.3)
<b>Approved Use</b>	Low voltage landscape lighting <i>(outdoor use only)</i>
<b>IP Rating</b>	IP54
<b>Construction</b>	Copper Powder coated aluminum
<b>Installation Type</b>	Stake mount
<b>Standard Inclusion</b>	Internal hexcell louver
<b>Accessories</b> <i>Order separately</i>	LS617 Frosted lens LLLS Linear spreader lens LS643-R/G/B/Y Dichroic color filters
<b>Remote Transformer</b>	Refer to the Technical Data section for application specific options


Any luminaire can become hot - take care with appropriate use and placement



LS192-1A Grevillea



LS192-2A Double Grevillea

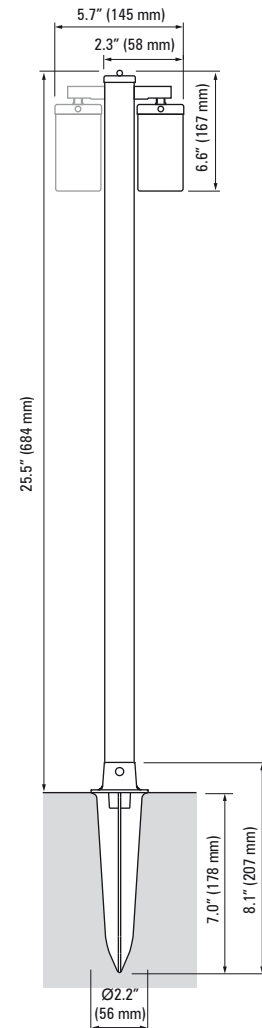

LAMP				FINISH			
Description	Wattage	Base	Voltage	Code	Material	Description	Code
MR16	20 W IRC max	GU5.3	12 V	LS192-1A	Copper	Polished copper	CU
MR16	2 x 20 W IRC max	GU5.3	12 V	LS192-2A	Aluminum	Black, powder coated	CB
						Silver, powder coated	CS

## Transformers for Landscape Lighting Applications

**LS-TWM-1-300**

Magnetic transformer - wall mounted

<b>Input</b>	120 V
<b>Rating</b>	300 W
<b>Output</b>	12/13/14/15 V
<b>Output Circuits</b>	1
<b>Protection</b>	Electrostatic shield, magnetic breaker
<b>Approvals</b>	UL, CUL
<b>NEMA Rating</b>	3R
<b>Construction</b>	Stainless steel
<b>Dimensions</b>	<b>H</b> 17.6" (447 mm) <b>W</b> 6.8" (173 mm) <b>D</b> 6.19" (157 mm)
<b>Weight</b>	27 lb (12.3 kg)

**LS-TWM-3-900**

Magnetic transformer - wall mounted

<b>Input</b>	120 V
<b>Rating</b>	900 W
<b>Output</b>	12/13/14/15 V
<b>Output Circuits</b>	3
<b>Protection</b>	Electrostatic shield, magnetic breaker
<b>Approvals</b>	UL, CUL
<b>NEMA Rating</b>	3R
<b>Construction</b>	Stainless steel
<b>Dimensions</b>	<b>H</b> 18.6" (472 mm) <b>W</b> 7.8" (198 mm) <b>D</b> 6.19" (157 mm)
<b>Weight</b>	34 lb (15.5 kg)

**LS-TDB1-300**

Magnetic transformer - direct burial

<b>Input</b>	120 V
<b>Rating</b>	300 W
<b>Output</b>	12.5 V
<b>Output Circuits</b>	1
<b>Protection</b>	Circuit breaker
<b>Approvals</b>	ETL (US and Canada)
<b>NEMA Rating</b>	12
<b>Construction</b>	Reinforced composite
<b>Dimensions</b>	<b>H</b> 9" (229 mm) <b>W</b> 9" (229 mm) <b>D</b> 7" (178 mm)
<b>Weight</b>	8 lb (3.6 kg)

**LS-TWM-2-600**

Magnetic transformer - wall mounted

<b>Input</b>	120 V
<b>Rating</b>	600 W
<b>Output</b>	12/13/14/15 V
<b>Output Circuits</b>	2
<b>Protection</b>	Electrostatic shield, magnetic breaker
<b>Approvals</b>	UL, CUL
<b>NEMA Rating</b>	3R
<b>Construction</b>	Stainless steel
<b>Dimensions</b>	<b>H</b> 17.6" (447 mm) <b>W</b> 6.8" (173 mm) <b>D</b> 6.19" (157 mm)
<b>Weight</b>	29 lb (13.2 kg)

**LS-TWM-4-1200**

Magnetic transformer - wall mounted

<b>Input</b>	120 V
<b>Rating</b>	1200 W
<b>Output</b>	12/13/14/15 V
<b>Output Circuits</b>	4
<b>Protection</b>	Electrostatic shield, magnetic breaker
<b>Approvals</b>	UL, CUL
<b>NEMA Rating</b>	3R
<b>Construction</b>	Stainless steel
<b>Dimensions</b>	<b>H</b> 18.6" (472 mm) <b>W</b> 7.8" (198 mm) <b>D</b> 6.19" (157 mm)
<b>Weight</b>	37 lb (16.8 kg)

