

 TYPE

 CATALOG #

 PROJECT

 NOTES


LED RECESSED LUMINAIRE

rStrata-13

Utilitarian recessed wall luminaire in 1 LED. Available in copper.

Quick Facts

- Stamped copper
- Natural, powder-coated, or antique copper finish
- Cree® integrated LEDs
- Tamper-resistant features
- Color temperature filters
- Compatible with Luxor® technology
- Phase and Luxor dimmable
- Input voltage: 10 to 15 Vac/Vdc

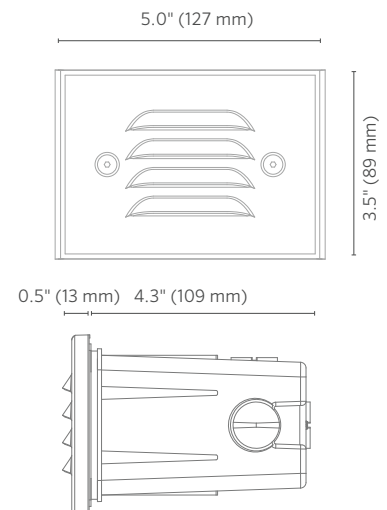

rStrata-13 SPECIFICATIONS

Output	1 LED
Total Lumens[†]	10
Input Voltage	10 to 15 V
Input Power	2.0 W
Power Consumption (VA)	2.4 W
Efficacy (lm/W)	5
Color Rendering Index (CRI)	86
Center Beam Candlepower	6
Dimming	
Primary Dimming (Transformer)	Consult transformer specifications
Secondary Dimming (Fixture)	Phase-cut**
RGBW Available	No
Luxor Compatibility	
Default	Zoning
ZD Option	Zoning/Dimming
Minimum Rated Life L90 B10 (Hrs)	55,000
BUG Rating	B0-U1-G0

[†] Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).

** For optimal performance, use a trailing-edge (reverse phase-cut) dimmer.

Lumascap

Lumascap transforms spaces with precision-engineered lighting solutions, proven to perform. Since 1991, customers have relied on us as a leading manufacturer of high-quality, innovative luminaires that solve their toughest lighting challenges. Our global experts combine sophisticated design, advanced technologies, quality materials, and rigorous testing to manufacture a comprehensive range of lighting systems that consistently exceed performance expectations. Lumascap is a member of the Hunter Industries family of companies. Learn more at lumascap.com.

Materials

Stamped C110 copper faceplate, A380 aluminum housing, PBT construction box/sleeve, and stainless steel hardware.

Socket

Socket contains MoistureBlock™ Technology, preventing moisture from wicking up into sealed areas of the fixture.

Faceplate

Stamped C110 copper faceplate with frosted polycarbonate lens.

Construction Sleeve

Vertical and horizontal ½" NPT knockouts. Sleeve protector included, preventing caving during wall fabrication.

Lamp

Integrated module with Cree LEDs. Gold-plated connectors and conformal coated for maximum reliability and corrosion resistance. Proprietary onboard intelligent driver uses firmware-controlled temperature regulation, maximizing LED life. Field upgradable and replaceable, the LEDs are rated to 55,000 hrs. Maximum drive current: 1 A.

Housing

Die-cast aluminum housing with capacity for one 1 LED integrated LED.

Hardware

Tamper-resistant stainless steel fasteners included.

Lens

Plastic lens with shock resistance and high tolerance for thermal expansion and stress.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length

Power

Input 10 to 15 Vac/Vdc, 50/60 Hz. Remote transformer required (specify separately).

Optics

Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (preinstalled), 3,900K (no lens), 4,500K, and 5,200K. Color temperature lenses field serviceable.

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Control

ZDCLink® utilizes Luxor Technology to zone light fixtures in up to 250 groups and dim each group in 1% increments between 0 and 100%. Select the ZD option for zoning/dimming. Standard fixture is zoneable with ZDCLink.

Finish

Options of natural copper finish, antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect, or TGIC powder-coat finish. Antique finishes sealed with a clear TGIC powder-coat layer.

Weight

2.3 lbs (1.0 kg)

Installation Requirements

Designed for recessed installation in a vertical wall in the down lighting position only.

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

International Compliance

Compliant per IEC 60598-1 and IEC 60598-2-4 when used with International Wall Kit ("EKITWALL").

Dark-Sky Compliance

Select a light source of 3,000K or lower to meet International Dark-Sky Association criteria.

IES Classification

Type IV

Manufacturing

ISO 9001:2015 certified facility



Warranty

5-year limited warranty

Listings



rStrata-13 ORDERING INFORMATION

Luminaire	Luxor Option	Output	Color Temp	Finish			
rSTR-13	■ [default] Zone	■ 1LED 10 lm	■ K27 2,700K	■ CU Natural Copper		■ WT White	
	■ ZD Zone/Dim			■ AB Bronze Metallic on Copper		■ DA Dark Aluminum	
				■ AT Antique Tumbled on Copper		■ BT Basalt Gray	
				■ BL Black		■ DB Dark Bronze	
				■ SL Anodic Silver		■ CC Custom RAL	
				■ LT Latte			
				■ AG Anthracite Gray			

EXAMPLE LUMINAIRE CONFIGURATION: rSTR-13-ZD-1LED-K27-SL[†]

rSTR-13

-

-

1LED

-

K27

-

[†] Hyphens are for readability purposes only.


ACCESSORIES: Specify Separately

Item	Code
■ WALL LIGHT CONNECTION KIT 	EKITWALL 


rStrata-13 PHOTOMETRICS

rStrata-13 1LED Illuminance at a Distance				
Feet (Meters)	Center Beam	Beam Width		
	Foot-Candles (Lux)	Vertical 60°	Horizontal 90°	
0.7' (0.2 m)	1.9 fc (21 lx)	0.8' (0.2 m)	1.3' (0.4 m)	
1.3' (0.4 m)	0.5 fc (5.4 lx)	1.6' (0.5 m)	2.7' (0.8 m)	
2.0' (0.6 m)	0.2 fc (2.2 lx)	2.4' (0.7 m)	4.0' (1.2 m)	
2.7' (0.8 m)	0.1 fc (1.1 lx)	3.3' (1.0 m)	5.4' (1.7 m)	
3.3' (1.0 m)	0.1 fc (1.1 lx)	4.1' (1.3 m)	6.7' (2.0 m)	
4.0' (1.2 m)	0.1 fc (1.1 lx)	4.9' (1.5 m)	8.0' (2.4 m)	


Note: Photometric data displayed using 3,900K filter with 20° spot lens.
ZDC option defaults to wide flood.

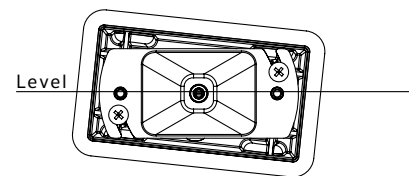

Perfectly Level, Every Time
The LevelX System allows the composite sleeve to be up to 3/8" (9.5 mm) off level in either direction while keeping the faceplate laser level.

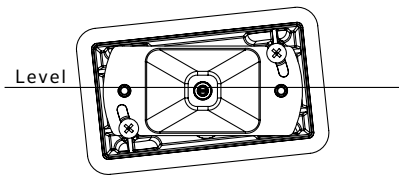

The secret: The trim attaches to the adjustable reflector assembly — not the composite sleeve or body. A heavy foam gasket keeps light spill to a minimum.

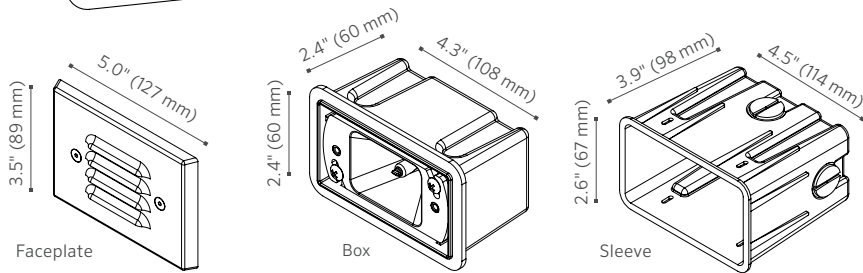

Cree is a registered trademark of Cree Inc. MoistureBlock is a trademark of DSM&T Co. Inc.

© 2021 Hunter Industries™. Hunter, Lumascape, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.