

LS371A Boulevard

Wallmount



The LS371A is a surface mounted, high strength steplight featuring an IP67 rating. The LED version offers both line voltage and low voltage options, and is ideal where a lower surface temperature is required. Impressively, the 2 W LED version generates virtually the same horizontal illuminance as the 20 W halogen, making the LED a true performance based alternative.


Specifications

Lamp Source LS371A	20 W Halogen T3 (G4)
Approved Use	Suitable for wet locations
IP Rating	IP67
Construction	Diecast brass
Installation Type	Wall mount
Remote Transformer	Refer to the Technical Data section for application specific options
Ambient Operating Temperature	-40 °F to 122 °F (-40 °C to +50 °C)
Surface Temperature	HumanTouch™ compliant ≤149 °F (≤65 °C) 20 W

Any luminaire can become hot - take care with appropriate use and placement



LS371 Boulevard
 Silver, powder coated

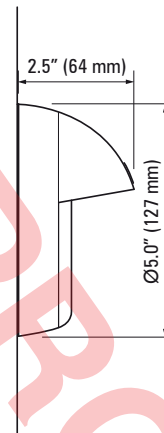

LAMP				FINISH		
Description	Wattage	Base	Voltage	Code	Description	Code
Halogen T3	20 W max	G4	12 V	LS371A	Shot blasted standard	BR
					Polished brass	P
					Black, powder coated	CB
					White, powder coated	CW
					Silver, powder coated	CS

Transformers for Landscape Lighting Applications

LS-TWM-1-300

Magnetic transformer - wall mounted

Input	120 V
Rating	300 W
Output	12/13/14/15 V
Output Circuits	1
Protection	Electrostatic shield, magnetic breaker
Approvals	UL, CUL
NEMA Rating	3R
Construction	Stainless steel
Dimensions	H 17.6" (447 mm) W 6.8" (173 mm) D 6.19" (157 mm)
Weight	27 lb (12.3 kg)

LS-TWM-3-900

Magnetic transformer - wall mounted

Input	120 V
Rating	900 W
Output	12/13/14/15 V
Output Circuits	3
Protection	Electrostatic shield, magnetic breaker
Approvals	UL, CUL
NEMA Rating	3R
Construction	Stainless steel
Dimensions	H 18.6" (472 mm) W 7.8" (198 mm) D 6.19" (157 mm)
Weight	34 lb (15.5 kg)

LS-TDB1-300

Magnetic transformer - direct burial

Input	120 V
Rating	300 W
Output	12.5 V
Output Circuits	1
Protection	Circuit breaker
Approvals	ETL (US and Canada)
NEMA Rating	12
Construction	Reinforced composite
Dimensions	H 9" (229 mm) W 9" (229 mm) D 7" (178 mm)
Weight	8 lb (3.6 kg)

LS-TWM-2-600

Magnetic transformer - wall mounted

Input	120 V
Rating	600 W
Output	12/13/14/15 V
Output Circuits	2
Protection	Electrostatic shield, magnetic breaker
Approvals	UL, CUL
NEMA Rating	3R
Construction	Stainless steel
Dimensions	H 17.6" (447 mm) W 6.8" (173 mm) D 6.19" (157 mm)
Weight	29 lb (13.2 kg)

LS-TWM-4-1200

Magnetic transformer - wall mounted

Input	120 V
Rating	1200 W
Output	12/13/14/15 V
Output Circuits	4
Protection	Electrostatic shield, magnetic breaker
Approvals	UL, CUL
NEMA Rating	3R
Construction	Stainless steel
Dimensions	H 18.6" (472 mm) W 7.8" (198 mm) D 6.19" (157 mm)
Weight	37 lb (16.8 kg)

Wall Mounted Transformers

LS-TWM-50

Magnetic transformer - wall mounted

Input	120 V or 240 V		
Rating	50 W		
Output	12 V or 24 V		
Output Circuits	1		
Protection	Isolation type		
Approvals	UL, CUL		
NEMA Rating	3R		
Dimensions	H 8.03" (204 mm)	W 3.31" (84 mm)	D 3.08" (78 mm)
Weight	4.4 lb (2 kg)		

LS-TWM-150

Magnetic transformer - wall mounted

Input	120 V or 240 V		
Rating	150 W		
Output	12 V or 24 V		
Output Circuits	1		
Protection	Isolation type		
Approvals	UL, CUL		
NEMA Rating	3R		
Dimensions	H 8.03" (204 mm)	W 3.31" (84 mm)	D 3.08" (78 mm)
Weight	5.6 lb (2.5 kg)		

LS-TWM-100

Magnetic transformer - wall mounted

Input	120 V or 240 V		
Rating	100 W		
Output	12 V or 24 V		
Output Circuits	1		
Protection	Isolation type		
Approvals	UL, CUL		
NEMA Rating	3R		
Dimensions	H 8.03" (204 mm)	W 3.31" (84 mm)	D 3.08" (78 mm)
Weight	4.8 lb (2.2 kg)		

LS-TWM-250

Magnetic transformer - wall mounted

Input	120 V or 240 V		
Rating	250 W		
Output	12 V or 24 V		
Output Circuits	1		
Protection	Isolation type		
Approvals	UL, CUL		
NEMA Rating	3R		
Dimensions	H 8.03" (204 mm)	W 3.31" (84 mm)	D 3.08" (78 mm)
Weight	6.7 lb (3 kg)		