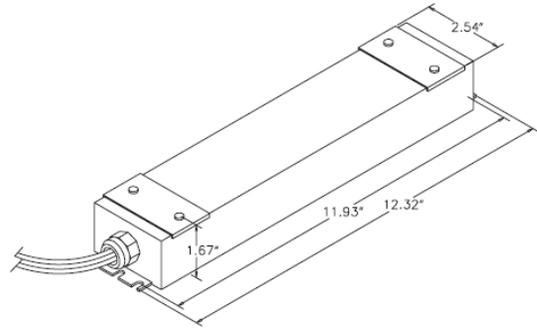


LSLED-24V96W277 24V DC Class 2 LED Power Supply**Specifications**

Input	120-277V, 50/60Hz
Output	24V DC, 4A, (0.05A min)
Efficiency	85% typ.
UL Classification	Class 2, UL1310, UL48
IP Rating	IP66
Ambient Operating Temp.	-22°F to 158°F (-30°C to 70°C)

**Fixture Compatibility**

In order to determine the maximum number of fixtures a transformer or power supply will operate, please refer to the compatibility tables. These tables can be found in the back of the LED catalog and online.

Indicative Dimensions

	In. (mm)
Case width	2.54 (65)
Case Height	1.67 (42)
Mounting length	11.93 (303)
Overall length	12.32 (313)

Indicative Circuit Diagram

Connections to be made in parallel, in accordance with NEC and local wiring regulations.

