FREE CALL 1-866-695-5862 US & Canada

info@lumascape.com

LUMASCAPE

LS482 Balitza

Bollard & Pathway









The LS482 is a luminaire constructed from 316 marine grade stainless steel with Lumascape's proprietary **ElectroPolishPlus™** process to give a long life to the surface finish and providing excellent corrosion resistance in harsh environments such as coastal locations. The LS482 is versatile in both function and appearance, having various configurations in height, head type, mounting method and lamp type.


Specifications

Lamp Source	13 W	CFL (GX24-q1)
	18 W	CFL (GX24-q2)
	35 W max	T4 Halogen (G6.35)
	23 W	CFL (E26 Medium) 120 V only
Approved Use	Suitable for wet locations	
IP Rating	IP66	
Construction	316 marine grade stainless steel	
Installation Types	Surface mount plate	
	Discreet mount	
Ambient Operating Temperature	-4 °F to 122 °F (-20 °C to +50 °C)	
Surface Temperature	HumanTouch	™ compliant ≤149 °F (≤65 °C)
	13 W - 18 W	/ CFL
	20 W	T4 Halogen

Any luminaire can become hot - take care with appropriate use and placement




LS482 Balitza

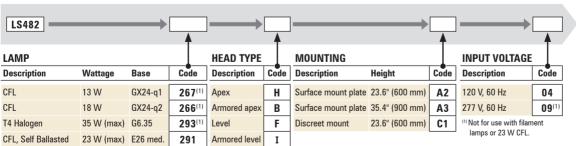


⁽¹⁾ Electronic ballast/transformer.

www.lumascape.com Jul 2013

Head Types

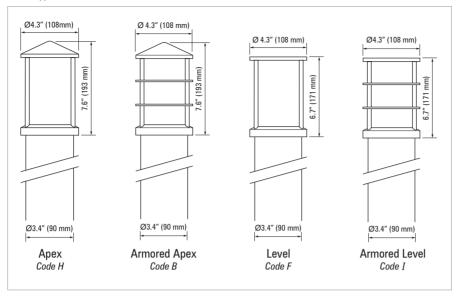

Installation Types

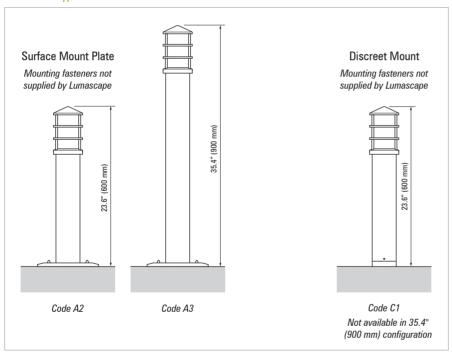

www.lumascape.com

Jul 2013