
LS2222

Dune **D2**

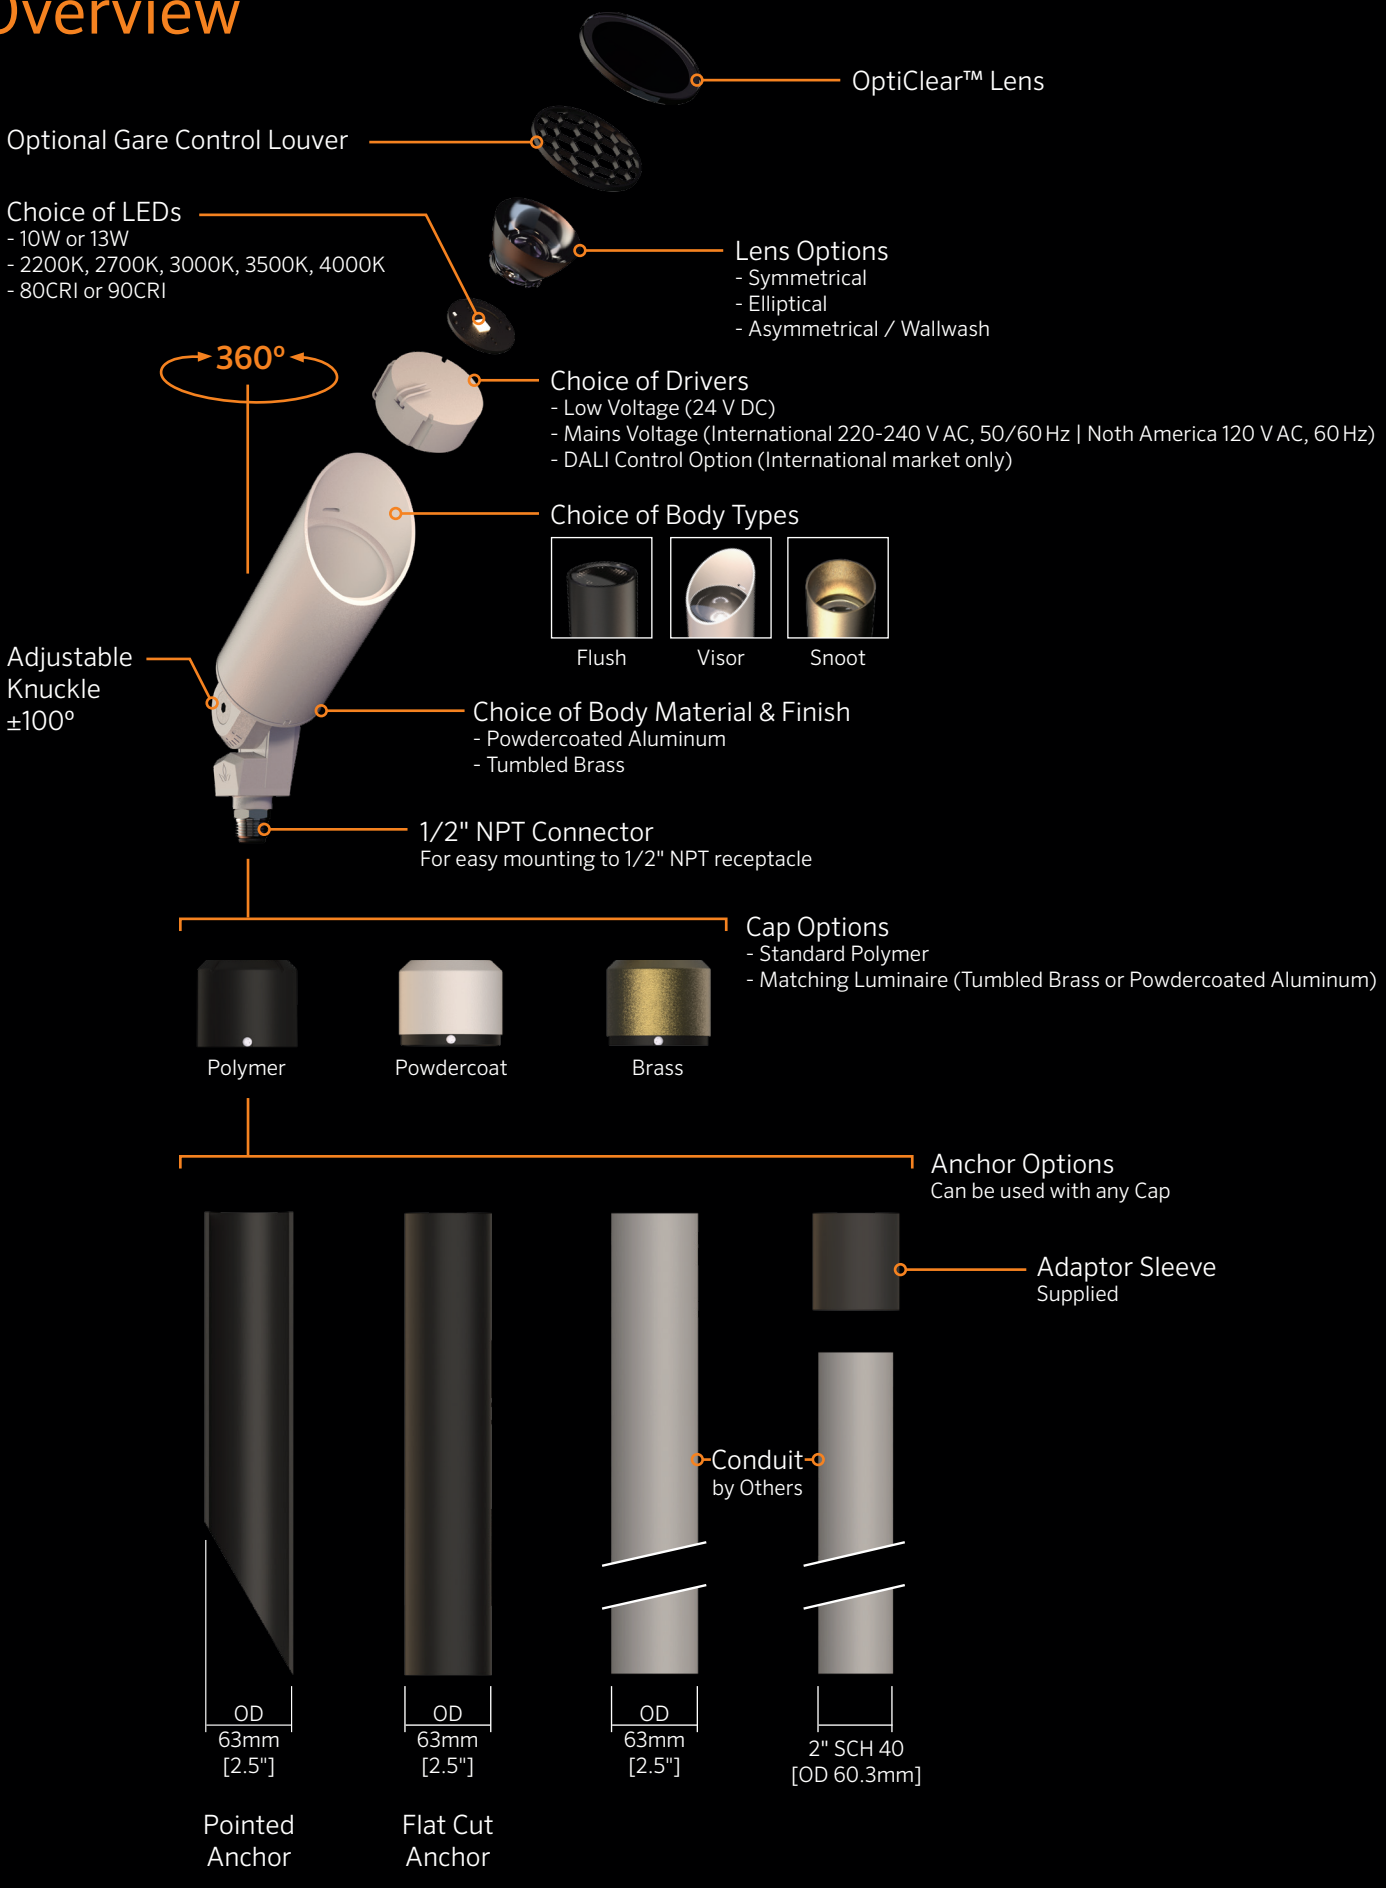



LUMASCAPE

Overview


OptiClear™ Lens
Optional Gare Control Louver
Choice of LEDs
- 10W or 13W
- 2200K, 2700K, 3000K, 3500K, 4000K
- 80CRI or 90CRI
Lens Options
- Symmetrical
- Elliptical
- Asymmetrical / Wallwash
360°
Choice of Drivers
- Low Voltage (24 V DC)
- Mains Voltage (International 220-240 V AC, 50/60 Hz | Noth America 120 V AC, 60 Hz)
- DALI Control Option (International market only)
Choice of Body Types
Flush
Visor
Snoot
Adjustable Knuckle ±100°
Choice of Body Material & Finish
- Powdercoated Aluminum
- Tumbled Brass
1/2" NPT Connector
For easy mounting to 1/2" NPT receptacle
Cap Options
- Standard Polymer
- Matching Luminaire (Tumbled Brass or Powdercoated Aluminum)
Polymer
Powdercoat
Brass
Anchor Options
Can be used with any Cap
Adaptor Sleeve
Supplied
Conduit
by Others
OD 63mm [2.5"]
OD 63mm [2.5"]
OD 63mm [2.5"]
2" SCH 40 [OD 60.3mm]
Pointed Anchor
Flat Cut Anchor


Dimensions

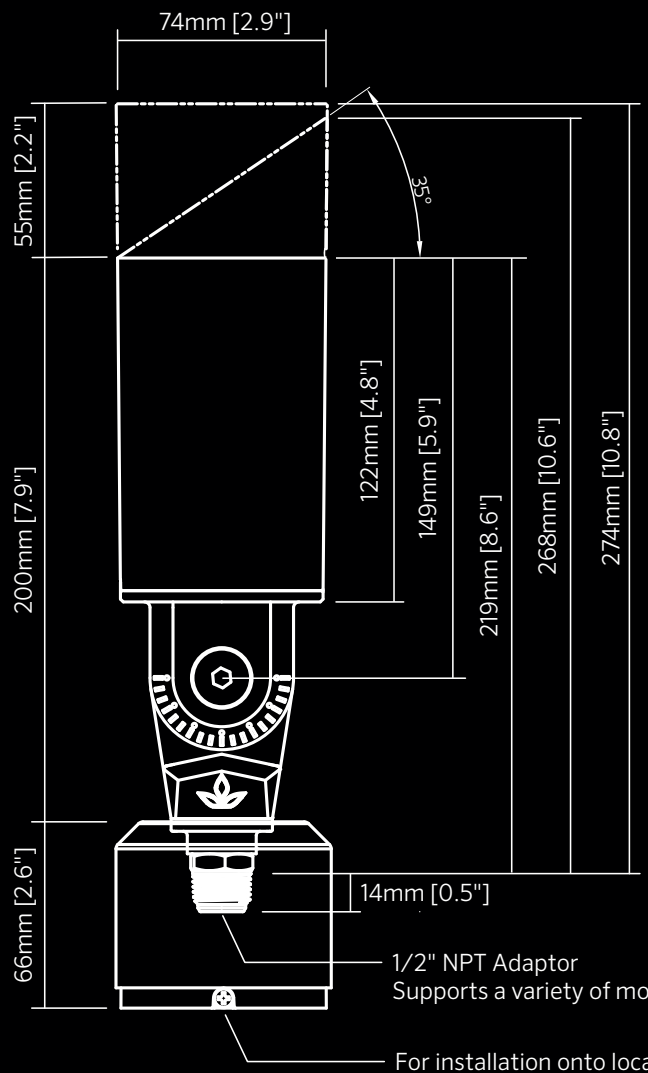

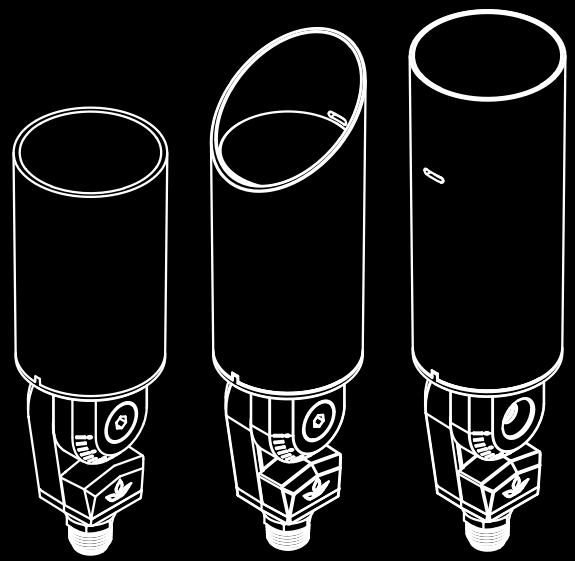

Mounting Suggestions

Ensure all installations comply with local electrical standards.

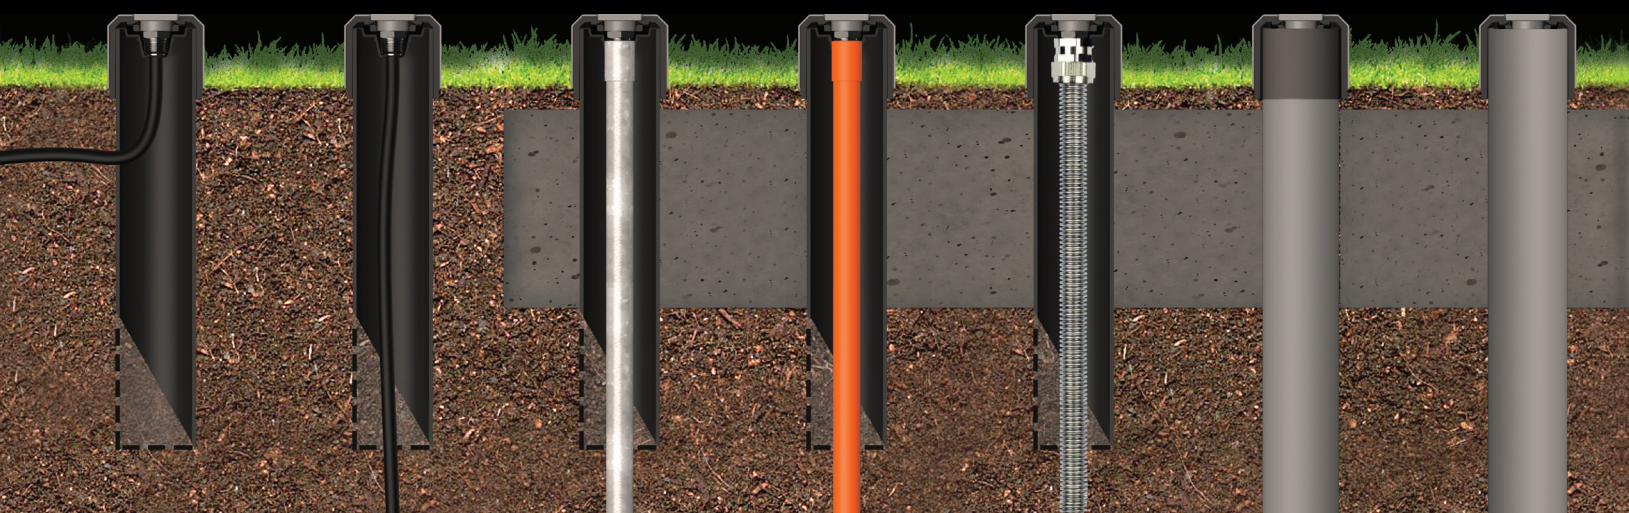



Asia Pacific

Brisbane Technology Park
77 Brandl Street, Eight Mile Plains
Queensland, 4113, Australia
P: +61 7 3854 5000
F: +61 7 3854 5001
E: sales@lumascape.com

North America

1940 Diamond Street, San Marcos
California, 92078, United States
P: +1 650 595 5862
F: +1 650 595 5820
E: info@lumascape.com

Discover Dune D2

lumascape.com

LUMASCAPE