



Project Name	
Type	
Part Number	
Quantity	
Notes	

Product Overview

The aSpur-6 is a stylish area luminaire that adds elegance and sophistication to modern lighting installations in 1 and 3 LED. Available in aluminum. An RGBW version is also available for use with ZDCLink® controllers.

Features

Total Lumens	245 lm
Power Consumption	2.2 W   4.4 W   7.2 W
Input Voltage	White: 10-15 Vac/dc, 50/60 Hz   ZDC: 11-15 Vac/dc, 50/60 Hz
Installation Requirements	Downward direction only
Typical Lifetime	White: 72,000 hrs   RGBW: 55,000 hrs
Weight	1.0 lb (0.5 kg)
Compliance	    RoHS COMPLIANT
Color Options	

Technology







## Written Specifications

### Electrical

Power Consumption	Specified power consumption indicates the full apparent power.
Input Voltage	White: 10–15 Vac/dc, 50/60 Hz.  RGBW: 11–15 Vac, 50/60 Hz.  Remote transformer required (specify separately).
Configuration	Integral driver.
LED	White: Lumileds®  RGBW: Cree®
Thermal Management	CoolDrive™ onboard thermal monitoring and control.
Lifetime	White: >72,000 hours (L70, B10, TM21 Reported)  RGBW: >55,000 hours (L70, B10, TM21 Reported)
Dimming	Luxor® control or a trailing-edge (reverse phase-cut) dimmer.

### Control

Luxor® Control	The ZDCLink Controller utilizes Luxor Technology™ to zone luminaires in up to 250 groups, dim each group in 1% increments between 0% and 100%, or change to one of 30,000+ colors with RGBW LEDs. Select the ZD option for zoning/dimming or ZDC for zoning/dimming/color. Standard luminaire is zoneable with ZDCLink.
----------------	---

### Physical

Construction	Aluminum A380 housing and extrusion with stainless steel hardware.
Finish	Two-layer protection of marine-grade anodization and polyester TGIC powder-coat finish, providing superior outdoor weathering in all conditions. Tested to ASTM standards.
Installation	Designed for installation in the downward lighting direction only.
Installation Accessories (Included)	Item ships with 30" (760 mm) length of standard North American 1.0" schedule 40 conduit and conduit stabilizer for mounting.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length, measured from the light aperture. International ("e") length is shorter.
Socket	MicroAntileach™ Technology to prevent moisture from wicking up into sealed areas of the luminaire.
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C).
Lens	Polycarbonate lens with shock resistance and high tolerance for thermal expansion and stress.
Lens Transparency	Frosted
Hardware	Tamper-resistant stainless steel hardware.
Housing Capacity	Round 1LED, 3LED, or ZDC-M
Weight	1.0 lb (0.5 kg)


### Compliance

IP Rating	IP66
Environment	Dry, Damp, Wet locations

BUG Rating	B0-U1-B0
Certifications	UL 1838, CSA C22.2 No. 250.7, IEC 60598-1, IEC 605598-2-4, FCC Part 15, Subpart B, ISED Canada ICES-005, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3.  Default configuration UL Listed. CE certification is met when the “e” option is selected.
<b>Overview</b>	
About Us	Lumascape transforms spaces with precision-engineered lighting solutions, proven to perform. Since 1991, customers have relied on us as a leading manufacturer of high-quality, innovative luminaires that solve their toughest lighting challenges. Our global experts combine sophisticated design, advanced technologies, quality materials, and rigorous testing to manufacture a comprehensive range of lighting systems that consistently exceed performance expectations. Lumascape is a member of the Hunter Industries Family of Companies. Learn more at <a href="https://lumascape.com">lumascape.com</a> .
Manufacturing	ISO 9001:2015 certified facility.
Warranty	5-year limited warranty.

# Specifications

## Dimensions

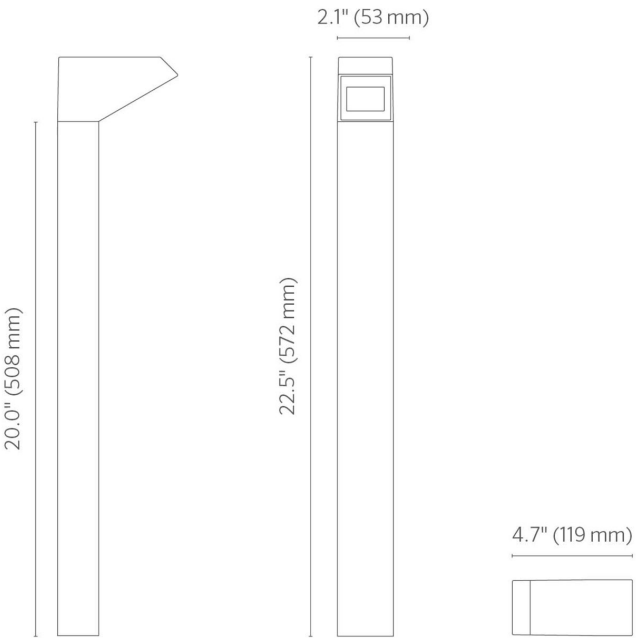

Configuration

For complete and up-to-date product options, configure the aSPR6 using our online [product configurator](#).

aSPR6

Code

Control

Output

Light Source

Compliance

Height

Mounting & Installation

Finish

Control

- ☐ **Standard (-)**  
1) On/Off, 2) Phase-cut Dimming, or 3) Zone with Luxor® Technology using the ZDClick Lighting Controller.
- ☐ **Zone/Dim (ZD)**  
Zone/Dim with Luxor® Technology using the ZDClick Lighting Controller.
- ☐ **Zone/Dim/Color (ZDC)**  
Zone/Dim/Color with Luxor® Technology using the ZDClick Lighting Controller.

Output

- ☐ **2.2 W (1LED)**  
98 lm
- ☐ **4.4 W (3LED)**  
245 lm
- ☐ **4.4 W**  
245 lm, for ZD control
- ☐ **7.2 W**  
For ZDC control

Light Source

- ☐ **Static White (K27)**  
2,700 K (80+ CRI)
- 
- ☐ **RGBW**  
For ZDC control
- 

Compliance

- ☐ **North America**  
UL listed
- ☐ **International (E)**  
UL listed and CE approved. Required for shipment outside of North America.

Height

- ☐ **Standard (24)**  
24" (540 mm)

Mounting & Installation

☐ **Ground Mount with Conduit (Default)**  
Luminaire secured to ground using North American 1.0" schedule 40 conduit, with stabilizer.

☐ **Deck Mount (DM)**  
1.75" x 1.75" x 2.0" (44 mm x 32 mm x 51 mm)



Finish

☐ **Black (BL)**  
RAL9004 from RAL Classic collection



☐ **Anthracite Gray (AG)**  
RAL7016 from RAL Classic collection



☐ **Basalt Gray (BT)**  
RAL7012 from RAL Classic collection



☐ **Graphite Gray (GH)**  
Graphite Gray powder-coat finish



☐ **Anodic Silver (SL)**  
RAL9006 from RAL Classic collection



☐ **White (WT)**  
RAL9016 from RAL Classic collection



☐ **Dark Bronze (DB)**  
RAL8019 from RAL Classic collection



☐ **Latte (LT)**  
RAL7006 from RAL Classic collection



☐ **Dark Aluminium (DA)**  
RAL9007 from RAL Classic collection



☐ **Custom RAL (CC)**  
A one-off custom color setup fee applies. Click on 'More Info' button to add to your enquiry. Contact Lumascape for volume discount on set-up fee.



# Accessories

## Mounting & Installation

Specify Separately

- ☐ **Deck Mount (MPL-DM)**



## Power Supplies

Specify Separately

- ☐ **Multi-Tap Transformer (PROLINK)**

The industry's most reliable multi-tap transformer.



- ☐ **ZDCLink® Lighting Controller (ZDCLink)**

A combined lighting controller and transformer (120 Vac to 14 Vac) that offers powerline zoning, dimming, RGBW color changing, and optional Wi-Fi control via Luxor Technology™



- ☐ **Dimmable Mini Transformer (ST-120-DIM)**

60 W, 120 V to 12 Vac step-down transformer.



- ☐ **Non-Dimmable Mini Transformer (ST-UV)**

30 W universal voltage step-down transformer.



- ☐ **6 W Plug-in Transformer (MT-6W)**

Standard North American Type A, Class 2 transformer with 6 W capacity and 1' (300 mm) flying leads.

- ☐ **30 W Plug-in Transformer (MT-30W)**

Standard North American Type A, Class 2 transformer with 30 W capacity and 1' (300 mm) flying leads.

## Supplemental Surge Protection

Specify Separately

- ☐ **In-Line Surge Arrestor (SURGE-MOD)**

Provides two additional layers of surge protection (up to 10KW) to any 12 Vac/dc LED luminaire.



Wire Connections

Specify Separately

- ☐ **Heat Shrink Wire Connectors - Small (WCHSSM20)**

Tin-coated copper butt splices with adhesive-filled heat shrink tubes.



- ☐ **Heat Shrink Wire Connectors - Medium (WCHSMD20)**

Tin-coated copper butt splices with adhesive-filled heat shrink tubes.



Custom Color

A one-off setup fee applies for each custom color per order. Add to your enquiry.

- ☐ **Custom Color Setup Fee: Essential Series (Custom RAL Color Setup)**

Custom RAL colour setup fee





# *Give every landscape* the light it deserves



When it comes to lighting design, why should architecture have all the fun? We've added more than 50 new landscape luminaires, offering unmatched performance, simple installation, and compatibility with state-of-the-art Luxor® Technology. Discover endless new possibilities to bring your next landscape lighting project to life at [lumасape.com](http://lumасape.com).



**ARCHITECTURAL & FACADE LIGHTING**  
Learn more. Visit [lumасape.com](http://lumасape.com)

 **LUMASCAPE**