




Project Name	
Type	
Part Number	
Quantity	
Notes	

Product Overview

The dAlta-5 is a compact direction luminaire engineered for coastal environments available in 3 LED. A zoning/dimming version is also available for use with ZDCLink® Controllers.

Features

Total Lumens	216 lm
Power Consumption	2.2 W 4.4 W 7.2 W
Input Voltage	White: 10-15 Vac/dc, 50/60 Hz ZDC: 11-15 Vac/dc, 50/60 Hz
Installation Requirements	Upward Direction Only
Typical Lifetime	White: 72,000 hrs RGBW: 55,000 hrs
Weight	1.8 lbs (0.8 kg)
Compliance	    RoHS COMPLIANT
Color Options	

Technology







Written Specifications

Electrical

Power Consumption	Specified power consumption indicates the full apparent power.
Input Voltage	White: 10–15 Vac/dc, 50/60 Hz. RGBW: 11–15 Vac, 50/60 Hz. Remote transformer required (specify separately).
Configuration	Integral driver.
LED	White: Lumileds® RGBW: Cree®
Thermal Management	CoolDrive™ onboard thermal monitoring and control.
Lifetime	White: >72,000 hours (L70, B10, TM21 Reported) RGBW: >55,000 hours (L70, B10, TM21 Reported)
Dimming	Luxor® control or a trailing-edge (reverse phase-cut) dimmer.

Control

Luxor® Control	The ZDLink Controller utilizes Luxor Technology™ to zone luminaires in up to 250 groups, dim each group in 1% increments between 0% and 100%, or change to one of 30,000+ colors with RGBW LEDs. Select the ZD option for zoning/dimming or ZDC for zoning/dimming/color. Standard luminaire is zoneable with ZDLink.
----------------	---


Physical

Construction	Machined C360 brass housing, knuckle, and angled glass support with brass hardware. C110 copper shield.
Finish	Options of natural metal finish or antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Antique finishes sealed with a clear TGIC powder-coat finish layer.
Beam Angles	White: Specify Spot (20°), Flood (35°), or Wide Flood (60°). For Narrow Spot (10°), specify any beam angle and remove beam angle lens on site. Beam angle is field serviceable. RGBW: Beam angle is fixed.
Installation	Designed for installation in the upward lighting direction only.
Installation Accessories (Included)	Item ships with the ProAim™ Adjustable Ratcheting Stake (PARS). Stake is 10" long, includes tamper resistant features, and is made from ABS.
Adjustability	Compress-and-lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical alignment.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length, measured from the light aperture.
Socket	MicroAntileach™ Technology to prevent moisture from wicking up into sealed areas of the luminaire.
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C).
Lens	OptiClear™ tempered glass for exceptional optical purity and load strength.


Lens Transparency	White: Clear
	RGBW: Frosted
Glare Control	90° cutoff or 45° long shield option. Drainage hole feature on 90°
Hardware	Brass and/or stainless steel hardware
Threads	1/2"-14 NPSM
Housing Capacity	Round 1LED, 3LED, or ZDC-M
Weight	2.8 lb (1.3 kg)
Compliance	
IP Rating	IP65
Environment	Dry, Damp, Wet locations
Certifications	UL 1838. Compliant per IEC 60598-1 and IEC 60598-2-4 when used with the Ground Mount ("GM-XX") or alternate mount greater than or equal to IP65.
Overview	
About Us	Lumascape transforms spaces with precision-engineered lighting solutions, proven to perform. Since 1991, customers have relied on us as a leading manufacturer of high-quality, innovative luminaires that solve their toughest lighting challenges. Our global experts combine sophisticated design, advanced technologies, quality materials, and rigorous testing to manufacture a comprehensive range of lighting systems that consistently exceed performance expectations. Lumascape is a member of the Hunter Industries Family of Companies. Learn more at lumascape.com .
Manufacturing	ISO 9001:2015 certified facility.
Warranty	5-year limited warranty.

Specifications

Dimensions Standard

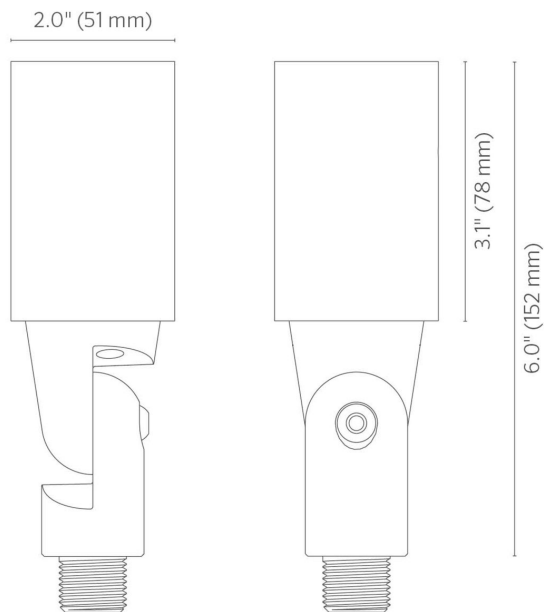

Dimensions Long

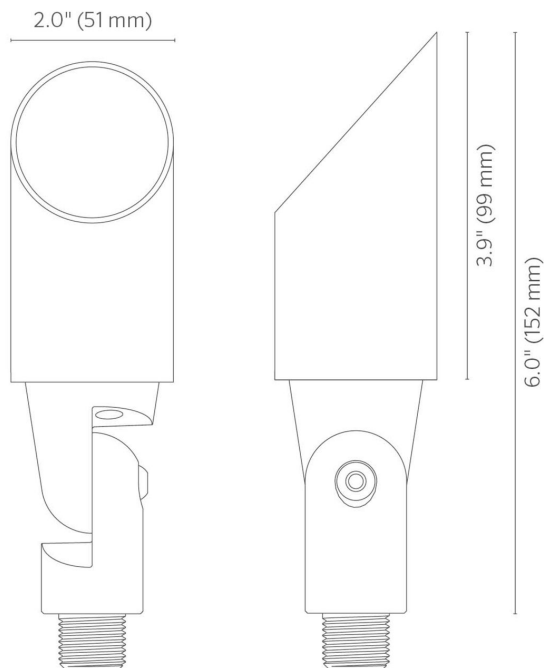

Photometrics 3LED

dAlta-5 3 LED* Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candles (Lux)	Vertical 35.5°	Horizontal 35.8°
5' (1.5 m)	25 fc (245 lx)	3.2' (1.0 m)	3.2' (1.0 m)
10' (3.0 m)	5.7 fc (61 lx)	6.4' (2.0 m)	6.5' (2.0 m)
15' (4.6 m)	2.5 fc (27 lx)	9.6' (2.9 m)	9.7' (3.0 m)
20' (6.1 m)	1.4 fc (15 lx)	12.8' (3.9 m)	12.9' (3.9 m)
25' (7.6 m)	0.9 fc (10 lx)	16.0' (4.9 m)	16.1' (4.9 m)
30' (9.1 m)	0.6 fc (7 lx)	19.2' (5.9 m)	19.4' (5.9 m)

Note: Photometric data displayed using 2,700 K lamp with a Flood (35°) optic. ZDC option defaults to Wide Flood.

Photometrics ZDT

dAlta-5 ZDT Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width
	Foot-Candles (Lux)	21.7°
4' (1.2 m)	31 fc (335 lx)	2' (0.5 m)
8' (2.4 m)	8 fc (84 lx)	3' (1.0 m)
12' (3.7 m)	4 fc (38 lx)	5' (1.4 m)
16' (4.9 m)	2 fc (22 lx)	6' (1.9 m)
20' (6.1 m)	1.3 fc (14 lx)	8' (2.4 m)
24' (7.3 m)	0.9 fc (10 lx)	9' (2.8 m)

Note: Photometric data displayed using 2,700 K lamp with a Flood (35°) optic. ZDC option defaults to Wide Flood.

Photometrics ZDC

dAlta-5 ZDC Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width
	Foot-Candles (Lux)	
		41.2°
4' (1.2 m)	14 fc (148 lx)	3' (0.9 m)
8' (2.4 m)	3 fc (37 lx)	6' (1.8 m)
12' (3.7 m)	1.5 fc (16 lx)	9' (2.7 m)
16' (4.9 m)	0.9 fc (10 lx)	12' (3.7 m)
20' (6.1 m)	0.6 fc (7 lx)	15' (4.6 m)
24' (7.3 m)	0.4 fc (4 lx)	18' (5.5 m)

Note: Photometric data displayed using 2,700 K lamp with a Flood (35°) optic. ZDC option defaults to Wide Flood.

Configuration

For complete and up-to-date product options, configure the dALT5 using our online [product configurator](#).

dALT5

Code

Control

Output

Light Source

Beam Angles

Compliance

Shielding

Finish

Mounting & Installation




Control

- ☐ **Standard (-)**
1) On/Off, 2) Phase-cut Dimming, or 3) Zone with Luxor® Technology using the ZDClick Lighting Controller.
- ☐ **Zone/Dim (ZD)**
Zone/Dim with Luxor® Technology using the ZDClick Lighting Controller.
- ☐ **Zone/Dim/Color (ZDC)**
Zone/Dim/Color with Luxor® Technology using the ZDClick Lighting Controller.

Output

- ☐ **2.2 W (1LED)**
93 lm
- ☐ **4.4 W (3LED)**
216 lm
- ☐ **4.4 W**
216 lm, for ZD control
- ☐ **4.5 W**
105 lm, Wildlife-friendly, for ZD control
- ☐ **7.2 W**
For ZDC control

Light Source

- ☐ **Static White (K27)**
2,700 K (80+ CRI)
- 
- ☐ **RGBW**
For ZDC control
- 
- ☐ **Wildlife-Friendly (T)**
Amber (585 to 595 nm)
- 

Beam Angles

Published angles may vary slightly to photometric data. Please refer to IES files where relevant.

- ☐ **Spot (SP)**
20° beam angle
- ☐ **Flood (FL)**
35° beam angle
- ☐ **Flood**
45° beam angle, for ZDC control
- ☐ **Wide Flood (WF)**
60° beam angle

Compliance

☐ **North America**
UL listed



☐ **International (E)**
Bracket mount, UL listed and CE approved. Required for shipment outside of North America



Shielding

☐ **Standard Shroud**
90° Straight Shroud

☐ **Long Shroud (LS)**
45° Angled Shroud

Finish

☐ **Natural Copper (CU)**
Requires the selection of cover option.



☐ **Antique Bronze (AB)**
Natural brass material with brushed antique effect. Finish sealed with a clear TGIC powder-coat finish layer.



☐ **Antique Tumbled (AT)**
Natural brass material with tumbled antique effect. Finish sealed with a clear TGIC powder-coat finish layer.



Mounting & Installation

Included with product.

☐ **ProAim™ Ratcheting Stake**
10" (250 mm) adjustable stake for 1/2"-14 NPSM threads



Accessories

Mounting & Installation

Specify Separately

☐ **Super J-Box Stake (SJ)**

2.0" (51 mm) metal cap with ½"-14 NPSM threads over an 11" (279 mm) ground stake.



☐ **Post Mount (PM)**

Suitable for use on ½" NPSM ground-mount luminaires and is specified separately.



☐ **Ground Mount (GM)**

The Ground Mount is a 4.4" (112 mm) aluminum cap with ½"-14 NPSM threads and wire compartment; 2.0" schedule 40 conduit.



☐ **Versabox® (VB-050)**

A 1.5" (38 mm) brass cap with ½"-14 NPSM threads.



☐ **Gutter Mount (GM-SS)**

A 4.4" (112 mm) aluminum cap with ½"-14 NPSM threads and wire compartment; 2.0" schedule 40 conduit.



☐ **Line Mount (LNM)**

In-ground mounting accessory with cavity for mini transformers.



Risers

Specify Separately

☐ **Copper Straight Riser (—)**

1.2" (30 mm) OD and ½"-14 Male and Female NPSM threads



Lens Accessories

Specify Separately

☐ **Hex Baffle (250015250000)**

1.4" (36 mm) diameter (MR-11)



☐ **Solite Spread Lens (250015420000)**

1.4" (36 mm) diameter (MR-11)



Power Supplies

Specify Separately

- ☐ **Multi-Tap Transformer (PROLINK)**
The industry's most reliable multi-tap transformer.



- ☐ **ZDCLink® Lighting Controller (ZDCLink)**
A combined lighting controller and transformer (120 Vac to 14 Vac) that offers powerline zoning, dimming, RGBW color changing, and optional Wi-Fi control via Luxor Technology™



- ☐ **Dimmable Mini Transformer (ST-120-DIM)**
60 W, 120 V to 12 Vac step-down transformer.



- ☐ **Non-Dimmable Mini Transformer (ST-UV)**
30 W universal voltage step-down transformer.



- ☐ **6 W Plug-in Transformer (MT-6W)**
Standard North American Type A, Class 2 transformer with 6 W capacity and 1' (300 mm) flying leads.

- ☐ **30 W Plug-in Transformer (MT-30W)**
Standard North American Type A, Class 2 transformer with 30 W capacity and 1' (300 mm) flying leads.

Supplemental Surge Protection

Specify Separately

- ☐ **In-Line Surge Arrestor (SURGE-MOD)**
Provides two additional layers of surge protection (up to 10KW) to any 12 Vac/dc LED luminaire.



Wire Connections

Specify Separately

- ☐ **Heat Shrink Wire Connectors - Medium (WCHSMD20)**
Tin-coated copper butt splices with adhesive-filled heat shrink tubes.



- ☐ **Heat Shrink Wire Connectors - Small (WCHSSM20)**
Tin-coated copper butt splices with adhesive-filled heat shrink tubes.



Give every landscape the light it deserves



When it comes to lighting design, why should architecture have all the fun? We've added more than 50 new landscape luminaires, offering unmatched performance, simple installation, and compatibility with state-of-the-art Luxor® Technology. Discover endless new possibilities to bring your next landscape lighting project to life at lumascap.com.



ARCHITECTURAL & FACADE LIGHTING
Learn more. Visit lumascap.com

 **LUMASCAPE**