






Project Name	
Type	
Part Number	
Quantity	
Notes	

Product Overview

The dChaz-6 is a flexible directional luminaire, available with several mounting options and accepts MR-16 lamps.

Features

Total Lumens	337 lm
Power Consumption	4.3 W 5.4 W
Input Voltage	10-15 Vac/dc, 50/60 Hz
Lamp Type	MR-16
Installation Requirements	Downward Direction Only
Typical Lifetime	White: 72,000 hrs
Weight	1.5 lb (0.7 kg)
Compliance	    RoHS COMPLIANT
Color Options	

Technology



Written Specifications

Electrical

Power Consumption	Specified power consumption indicates the full apparent power.
Input voltage	10–15 Vac/dc, 50/60 Hz. Remote transformer required (specify separately).
Lamp	MR-16
LED	Cree®
Thermal Management	CoolDrive™ onboard thermal monitoring and control.
Lifetime	White: >40,000 hours (L70, B10, TM21 Reported)
Dimming	Luxor® control or a trailing-edge (reverse phase-cut) dimmer.

Control

Luxor® Control	The ZDLink Controller utilizes Luxor Technology™ to zone luminaires in up to 250 groups, dim each group in 1% increments between 0% and 100%, or change to one of 30,000+ colors with RGBW LEDs. Select the ZD option for zoning/dimming or ZDC for zoning/dimming/color. Standard luminaire is zoneable with ZDLink.
----------------	---

Physical

Construction	Die-cast A380 aluminum housing and shield with stainless steel hardware. Die-cast zinc/aluminum alloy knuckle.
Finish	Two-layer protection of marine-grade anodization and polyester TGIC powder-coat finish, providing superior outdoor weathering in all conditions. Tested to ASTM standards.
Beam Angle	Dependent upon selected lamp.
Installation	Designed for installation in the downward lighting direction only.
Adjustability	Compress-and-lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical alignment.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length, measured from the light aperture. International ("e") length is shorter.
Socket	MR-16 GU5.3 socket with retaining clips. Ceramic socket base with heat-resistant contact pad. Stainless steel retaining clips ensure high spring force retention.
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C).
Lens	OptiClear™ tempered glass for exceptional optical purity and load strength.
Lens Transparency	Clear
Glare Control	45° angled shield or 3" deep 90° straight option.
Hardware	Tamper-resistant stainless steel hardware.
Threads	½"-14 NPSM
Housing Capacity	Standard MR-16 lamp
Weight	1.5 lb (0.7 kg)


Compliance

IP Rating	IP65
-----------	------

Environment	Dry, Damp, Wet locations
Certifications	UL 1838, CSA C22.2 No. 250.7, IEC 60598-1, IEC 605598-2-4, FCC Part 15, Subpart B, ISED Canada ICES-005, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3.
	Default configuration UL Listed. CE certification is met when the “e” option is selected.
Overview	
About Us	Lumascape transforms spaces with precision-engineered lighting solutions, proven to perform. Since 1991, customers have relied on us as a leading manufacturer of high-quality, innovative luminaires that solve their toughest lighting challenges. Our global experts combine sophisticated design, advanced technologies, quality materials, and rigorous testing to manufacture a comprehensive range of lighting systems that consistently exceed performance expectations. Lumascape is a member of the Hunter Industries Family of Companies. Learn more at lumascape.com .
Manufacturing	ISO 9001:2015 certified facility.
Warranty	5-year limited warranty.

Specifications

Dimensions

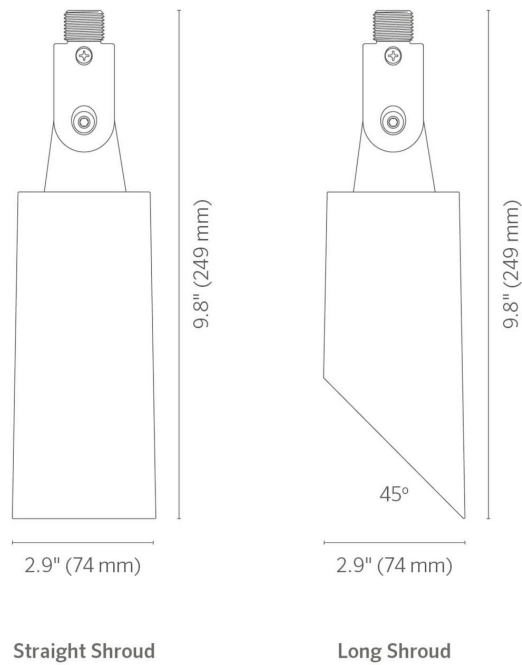

Photometrics LED20WFL

dChaz LED20WFL Illuminance at a Distance

Feet (Meters)	Center Beam Foot-Candles (Lux)	Beam Width Vertical 28°
3' (0.9 m)	69.5 fc (748 lx)	1.5' (0.5 m)
6' (1.8 m)	17.4 fc (187 lx)	3.0' (0.9 m)
9' (2.7 m)	7.7 fc (83 lx)	4.4' (1.3 m)
12' (3.7 m)	4.4 fc (47 lx)	5.9' (1.8 m)
15' (4.6 m)	2.8 fc (30 lx)	7.4' (2.3 m)
18' (5.5 m)	1.9 fc (21 lx)	8.9' (2.7 m)

Note: Photometric data displayed using 2,700 K with a 35° beam angle.

Photometrics LED35WFL

dChaz LED35WFL Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width
	Foot-Candles (Lux)	Vertical 35°
3' (0.9 m)	94 fc (1,012 lx)	1.7' (0.5 m)
6' (1.8 m)	24 fc (253 lx)	3.4' (1.0 m)
9' (2.7 m)	10 fc (112 lx)	5.1' (1.6 m)
12' (3.7 m)	6 fc (64 lx)	6.8' (2.1 m)
15' (4.6 m)	4 fc (41 lx)	8.4' (2.6 m)
18' (5.5 m)	2.6 fc (28 lx)	10.1' (3.1 m)

Note: Photometric data displayed using 2,700 K with a 35° beam angle.

Photometrics ZD35WFL

dChaz ZD35WFL Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width
	Foot-Candles (Lux)	Vertical 35°
3' (0.9 m)	94 fc (1,010 lx)	1.7' (0.5 m)
6' (1.8 m)	24 fc (253 lx)	3.4' (1.0 m)
9' (2.7 m)	10 fc (112 lx)	5.1' (1.6 m)
12' (3.7 m)	6 fc (64 lx)	6.8' (2.1 m)
15' (4.6 m)	4 fc (41 lx)	8.4' (2.6 m)
18' (5.5 m)	2.6 fc (28 lx)	10.1' (3.1 m)

Note: Photometric data displayed using 2,700 K with a 35° beam angle.

Configuration

For complete and up-to-date product options, configure the dCHZ6 using our online [product configurator](#).

dCHZ6							
Code	Control	Output	Light Source	Beam Angles	Compliance	Shielding	Finish

Control

- ☐ **Default (LED)**
1) On/Off or 2) Phase-cut Dimming
- ☐ **Zone/Dim (ZD)**
Zone/Dim with Luxor® Technology using the ZDLink Lighting Controller.

Output

- ☐ **4.3 W (20)**
261 lm
- ☐ **5.4 W (35)**
337 lm

Light Source

- ☐ **Static White (W)**
2,700 K (80+ CRI)



Beam Angles

Published angles may vary slightly to photometric data. Please refer to IES files where relevant.

- ☐ **Flood (FL)**
35° beam angle

Compliance

- ☐ **North America**
1/2" - 14" NPSM thread, UL listed
- ☐ **International (E)**
UL listed and CE approved. Required for shipment outside of North America.

Shielding

☐ **Long Shroud**
45° Angled Shroud

☐ **Straight Shroud (SS)**
90° Straight Shroud

Finish

☐ **Black (BL)**
RAL9004 from RAL
Classic collection



☐ **Anthracite Gray (AG)**
RAL7016 from RAL
Classic collection



☐ **Basalt Gray (BT)**
RAL7012 from RAL
Classic collection



☐ **Graphite Gray (GH)**
Graphite Gray powder-coat finish



☐ **Anodic Silver (SL)**
RAL9006 from RAL
Classic collection



☐ **White (WT)**
RAL9016 from RAL
Classic collection



☐ **Dark Bronze (DB)**
RAL8019 from RAL
Classic collection



☐ **Latte (LT)**
RAL7006 from RAL
Classic collection



☐ **Dark Aluminium (DA)**
RAL9007 from RAL
Classic collection



☐ **Custom RAL (CC)**
A one-off custom color setup fee applies. Click on 'More Info' button to add to your enquiry. Contact Lumascape for volume discount on set-up fee.



Accessories

Mounting & Installation

Specify Separately

☐ **Mini Mount (MM-050)**



☐ **Versabox® (VB-050)**
A 1.5" (38 mm) brass cap with ½"-14 NPSM threads.



☐ **Mini J-Box (MJ-050)**
A 1.5" (38 mm) aluminum wall mount with ½"-14 NPSM threads and wire compartment.



☐ **Treebox® (TB)**
A dual ½"-14 NPSM threads with wire compartment.



☐ **Gutter Mount (GM-SS)**
A 4.4" (112 mm) aluminum cap with ½"-14 NPSM threads and wire compartment; 2.0" schedule 40 conduit.



☐ **Wall Plate 1-Gang (WP-1G-050)**
1-gang wall plate with 1/2"-14 NPSM threads.



☐ **Wall Plate, Round (WP-RD-050)**
5" (127 mm) round wall plate with 1/2"-14 NPSM threads.



☐ **Non-Penetrating Tree Ring (TR)**
Adjustable, drill-free, non-penetrating tree ring, accommodates up to six luminaires.



Risers & Coupling

Specify Separately

☐ **Straight Riser (—)**
An aluminum straight riser with 0.8" (12 mm) OD and 1/2"-14 Male NPSM x2 threads.



☐ **Angled Sign-Light Riser (—)**
An aluminum angled sign-light riser with 0.8" (12 mm) OD, 45° bend, and 1/2"-14 NPSM x2 threads.



☐ **Straight Coupling (COUP)**
An aluminum straight coupling 1.3" (32 mm) x 2.0" (51 mm).



☐ **Coupling, 90-deg, 1/2" NPSM (ELBW-050)**
An aluminum 90° coupling 1.3" (32 mm) x 2.0" (51 mm).



☐ **Coupling, T, 1/2" NPSM (TMNT-050)**
An aluminum T Coupling, ½" NPSM Thread.



Lens Accessories

Specify Separately

- ☐ **Hex Baffle**
(250015260000)
2" (50 mm) diameter
(MR-16)



- ☐ **Linear Spread Lens**
(250013550000)
2" (50 mm) diameter
(MR-16)



- ☐ **Solite Spread Lens**
(250015240000)
2" (50 mm) diameter
(MR-16)



- ☐ **RecessorRing® (RR-MR16)**
Spacer pushes the lamp
farther into the fixture
body to reduce glare.



Power Supplies

Specify Separately

- ☐ **Multi-Tap Transformer (PROLINK)**
The industry's most
reliable multi-tap
transformer.



- ☐ **ZDClick® Lighting Controller (ZDClick)**
A combined lighting
controller and
transformer (120 Vac to
14 Vac) that offers
powerline zoning,
dimming, RGBW color
changing, and optional
Wi-Fi control via Luxor
Technology™



- ☐ **Dimmable Mini Transformer (ST-120-DIM)**
60 W, 120 V to 12 Vac
step-down transformer.



- ☐ **Non-Dimmable Mini Transformer (ST-UV)**
30 W universal voltage
step-down transformer.



- ☐ **6 W Plug-in Transformer (MT-6W)**
Standard North
American Type A, Class
2 transformer with 6 W
capacity and 1' (300 mm)
flying leads.

- ☐ **30 W Plug-in Transformer (MT-30W)**
Standard North
American Type A, Class
2 transformer with 30 W
capacity and 1' (300 mm)
flying leads.

Supplemental Surge Protection

Specify Separately

- ☐ **In-Line Surge Arrestor (SURGE-MOD)**
Provides two additional
layers of surge
protection (up to 10KW)
to any 12 Vac/dc LED
luminaire.



Wire Connections

Specify Separately

☐ Heat Shrink Wire Connectors - Small (WCHSSM20)

Tin-coated copper butt splices with adhesive-filled heat shrink tubes.



☐ Heat Shrink Wire Connectors - Medium (WCHSMD20)

Tin-coated copper butt splices with adhesive-filled heat shrink tubes.



Custom Color

A one-off setup fee applies for each custom color per order. Add to your enquiry.

☐ Custom Color Setup Fee: Essential Series (Custom RAL Color Setup)

Custom RAL colour setup fee



Give every landscape the light it deserves



When it comes to lighting design, why should architecture have all the fun? We've added more than 50 new landscape luminaires, offering unmatched performance, simple installation, and compatibility with state-of-the-art Luxor® Technology. Discover endless new possibilities to bring your next landscape lighting project to life at lumасape.com.



ARCHITECTURAL & FACADE LIGHTING
Learn more. Visit lumасape.com

 **LUMASCAPE**