







Project Name	
Type	
Part Number	
Quantity	
Notes	

Product Overview

The dFresco-11 is a substantial wall wash in 3, 6 or 9 LED in aluminum or brass construction. An RGBW version is also available for use with ZDCLink® systems.

Features

Total Lumens	811 lm
Power Consumption	4.4 W   9.3 W   12.2 W   11.0 W
Input Voltage	White: 10-15 Vac/dc, 50/60 Hz   ZDC: 11-15 Vac, 50/60 Hz
Installation Requirements	Upward Direction Only
Typical Lifetime	White: 72,000 hrs   RGBW: 55,000 hrs
Weight	3.8 lb (1.7 kg)
Compliance	   RoHS COMPLIANT
Color Options	

Technology







## Written Specifications

### Electrical

Power Consumption	Specified power consumption indicates the full apparent power.
Input Voltage	White: 10–15 Vac/dc, 50/60 Hz. RGBW: 11–15 Vac, 50/60 Hz. Remote transformer required (specify separately).
Configuration	Integral driver.
LED	White: Lumileds® RGBW: Cree®
Thermal Management	CoolDrive™ onboard thermal monitoring and control.
Lifetime	White: >72,000 hours (L70, B10, TM21 Reported) RGBW: >55,000 hours (L70, B10, TM21 Reported)
Dimming	Luxor® control or a trailing-edge (reverse phase-cut) dimmer.

### Control

Luxor® Control	The ZDCLink Controller utilizes Luxor Technology™ to zone luminaires in up to 250 groups, dim each group in 1% increments between 0% and 100%, or change to one of 30,000+ colors with RGBW LEDs. Select the ZD option for zoning/dimming or ZDC for zoning/dimming/color. Standard luminaire is zoneable with ZDCLink.
----------------	---


### Physical

Construction	Die-cast C360 brass housing, shield, and knuckle/base assembly with brass hardware.
Finish	Options of natural metal finish, antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect, or two-layer protection of sulfuric acid anodization and polyester TGIC powder-coat finish, providing superior outdoor weathering in all conditions. Tested to ASTM standards. Antique finishes sealed with a clear TGIC powder-coat layer.
Beam Angles	90° (H) x 80° (V)
Installation	Designed for installation in the upward lighting direction only.
Installation Accessories (Included)	Item ships with the ProAim™ Adjustable Ratcheting Stake (PARS). Stake is 10" long, includes tamper resistant features, and is made from ABS.
Adjustability	Compress-and-lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical alignment.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length, measured from the light aperture. International ("e") length is shorter.
Socket	MicroAntileach™ Technology to prevent moisture from wicking up into sealed areas of the luminaire.
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C).
Lens	Tempered glass lens with shock resistance and high tolerance for thermal expansion and stress.
Lens Transparency	Frosted

Glare Control	30° angled shield.
Hardware	Brass and/or stainless steel hardware
Threads	½"-14 NPSM
Housing Capacity	Round 1LED, 3LED, 6LED, 9LED, or ZDC-L
Weight	3.8 lb (1.7 kg)
<b>Compliance</b>	
IP Rating	IP65
Environment	Dry, Damp, Wet locations
Certifications	UL 1838, CSA C22.2 No. 250.7, IEC 60598-1, IEC 60598-2-4, FCC Part 15, Subpart B, ISED Canada ICES-005, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3
	Default configuration UL Listed. CE certification is met when the “e” option is selected.
<b>Overview</b>	
About Us	Lumascape transforms spaces with precision-engineered lighting solutions, proven to perform. Since 1991, customers have relied on us as a leading manufacturer of high-quality, innovative luminaires that solve their toughest lighting challenges. Our global experts combine sophisticated design, advanced technologies, quality materials, and rigorous testing to manufacture a comprehensive range of lighting systems that consistently exceed performance expectations. Lumascape is a member of the Hunter Industries Family of Companies. Learn more at <a href="https://lumascape.com">lumascape.com</a> .
Manufacturing	ISO 9001:2015 certified facility.
Warranty	5-year limited warranty.

Specifications

Dimensions

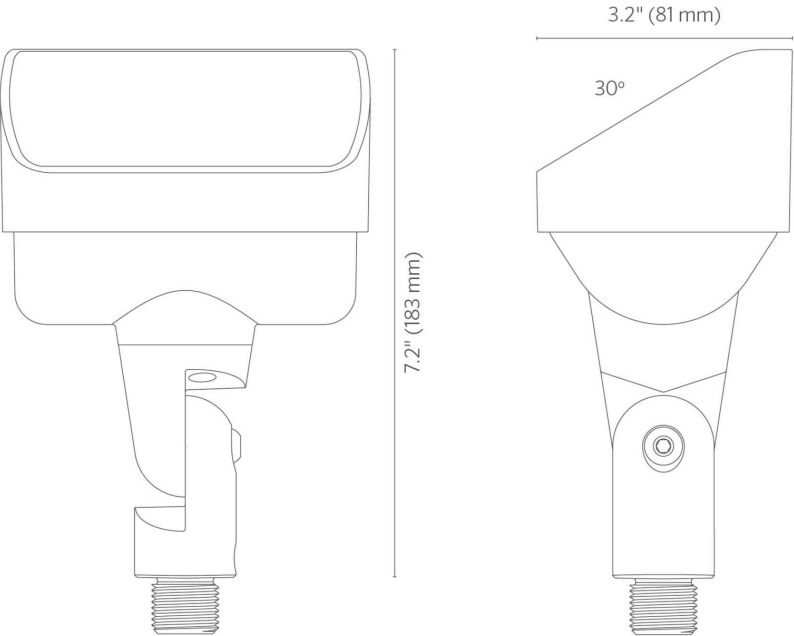

Photometrics 3LED

dFresco-11 3 LED Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candles (Lux)	Vertical 85.8°	Horizontal 92.4°
5' (1.5 m)	5.8 fc (63 lx)	9.3' (2.8 m)	10.4' (3.2 m)
10' (3.0 m)	1.5 fc (16 lx)	18.6' (5.7 m)	20.9' (6.4 m)
15' (4.6 m)	0.7 fc (7 lx)	27.9' (8.5 m)	31.3' (9.5 m)
20' (6.1 m)	0.5 fc (5 lx)	37.2' (11.3 m)	41.7' (12.7 m)
25' (7.6 m)	0.2 fc (2 lx)	46.4' (14.1 m)	52.1' (15.9 m)
30' (9.1 m)	0.2 fc (2 lx)	55.7' (17.0 m)	62.6' (19.1 m)

Note: Photometric data displayed using 2,700 K CCT.

Photometrics 6LED

dFresco-11 6LED Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candles (Lux)	Vertical 84.7°	Horizontal 91.8°
5' (1.5 m)	10 fc (112 lx)	9.1' (2.8 m)	10.3' (3.1 m)
10' (3.0 m)	2.6 fc (28 lx)	18.2' (5.5 m)	20.6' (6.3 m)
15' (4.6 m)	1.2 fc (12 lx)	27.3' (8.3 m)	31.0' (9.4 m)
20' (6.1 m)	0.7 fc (7 lx)	36.4' (11.1 m)	41.3' (12.6 m)
25' (7.6 m)	0.4 fc (4 lx)	45.5' (13.9 m)	51.6' (15.7 m)
30' (9.1 m)	0.3 fc (3 lx)	54.7' (16.7 m)	61.9' (18.9 m)

Note: Photometric data displayed using 2,700 K CCT.

Photometrics 9LED

dFresco-11 9 LED Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candles (Lux)	Vertical 83.5°	Horizontal 90.2°
5' (1.5 m)	16 fc (171 lx)	8.9' (2.7 m)	10.0' (3.0 m)
10' (3.0 m)	4.0 fc (43 lx)	17.9' (5.5 m)	20.1' (6.1 m)
15' (4.6 m)	1.8 fc (19 lx)	26.8' (8.2 m)	30.1' (9.2 m)
20' (6.1 m)	1.0 fc (11 lx)	35.7' (10.9 m)	40.1' (12.2 m)
25' (7.6 m)	0.6 fc (7 lx)	44.6' (13.6 m)	50.1' (15.3 m)
30' (9.1 m)	0.4 fc (5 lx)	53.6' (16.3 m)	60.2' (18.3 m)

Note: Photometric data displayed using 2,700 K CCT.

Photometrics ZDC

dFresco-11 ZDC Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candles (Lux)	Vertical 38.1°	Horizontal 40.2°
4' (1.2 m)	10.8 fc (116 lx)	2.8' (0.9 m)	2.9' (0.9 m)
8' (2.4 m)	2.7 fc (29 lx)	5.5' (1.7 m)	5.9' (1.8 m)
12' (3.7 m)	1.2 fc (13 lx)	8.3' (2.5 m)	8.8' (2.7 m)
16' (4.9 m)	0.7 fc (8 lx)	11.0' (3.4 m)	11.7' (3.6 m)
20' (6.1 m)	0.4 fc (4 lx)	13.8' (4.2 m)	14.6' (4.5 m)
24' (7.3 m)	0.3fc (3 lx)	16.6' (5.1 m)	17.6' (5.4 m)

Note: Photometric data displayed using 2,700 K CCT.

# Configuration

For complete and up-to-date product options, configure the dFRS11 using our online [product configurator](#).

dFRS11							
Code	Material	Control	Output	Light Source	Compliance	Finish	Mounting & Installation

## Material

- ☐ **Brass**  
Die-cast C360 brass with stainless steel hardware. Available in BS, AB or AT finishes only.
- ☐ **Aluminum (A)**  
Die-cast A380 aluminum with stainless steel hardware. Available in powder-coated finishes only.

## Control

- ☐ **Standard (-)**  
1) On/Off, 2) Phase-cut Dimming, or 3) Zone with Luxor® Technology using the ZDClick Lighting Controller.
- ☐ **Zone/Dim (ZD)**  
Zone/Dim with Luxor® Technology using the ZDClick Lighting Controller.
- ☐ **Zone/Dim/Color (ZDC)**  
Zone/Dim/Color with Luxor® Technology using the ZDClick Lighting Controller.

## Output

- ☐ **4.4 W (3LED)**  
305 lm
- ☐ **9.3 W (6LED)**  
540 lm
- ☐ **12.2 W (9LED)**  
811 lm
- ☐ **12.2 W**  
811 lm, for ZD control
- ☐ **11.0 W**  
For ZDC control

## Light Source

- ☐ **Static White (K27)**  
2,700 K (80+ CRI)
- 
- ☐ **RGBW**  
For ZDC control
- 

Compliance

☐ **North America**  
UL listed



☐ **International (E)**  
Bracket mount, UL listed  
and CE approved.  
Required for shipment  
outside of North  
America



Finish

☐ **Black (BL)**  
RAL9004 from RAL  
Classic collection



☐ **Anthracite Gray (AG)**  
RAL7016 from RAL  
Classic collection



☐ **Basalt Gray (BT)**  
RAL7012 from RAL  
Classic collection



☐ **Graphite Gray (GH)**  
Graphite Gray powder-  
coat finish



☐ **Anodic Silver (SL)**  
RAL9006 from RAL  
Classic collection



☐ **White (WT)**  
RAL9016 from RAL  
Classic collection



☐ **Dark Bronze (DB)**  
RAL8019 from RAL  
Classic collection



☐ **Latte (LT)**  
RAL7006 from RAL  
Classic collection



☐ **Dark Aluminium (DA)**  
RAL9007 from RAL  
Classic collection



☐ **Natural Brass (BS)**



☐ **Antique Bronze (AB)**  
Natural brass material  
with brushed antique  
effect. Finish sealed with  
a clear TGIC powder-  
coat finish layer.



☐ **Antique Tumbled (AT)**  
Natural brass material  
with tumbled antique  
effect. Finish sealed with  
a clear TGIC powder-  
coat finish layer.



☐ **Custom RAL (CC)**  
A one-off custom color  
setup fee applies. Click  
on 'More Info' button to  
add to your enquiry.  
Contact Lumascape for  
volume discount on set-  
up fee.



Mounting & Installation

Included with product.

☐ **ProAim™ Ratcheting Stake**  
10" (250 mm) adjustable  
stake for ½"-14 NPSM  
threads





## Accessories

### Mounting & Installation

Specify Separately

☐ **Super J-Box Stake (SJ)**

2.0" (51 mm) metal cap with 1/2"-14 NPSM threads over an 11" (279 mm) ground stake.



☐ **Post Mount (PM)**

Suitable for use on 1/2" NPSM ground-mount luminaires and is specified separately.



☐ **Ground Mount (GM)**

The Ground Mount is a 4.4" (112 mm) aluminum cap with 1/2"-14 NPSM threads and wire compartment; 2.0" schedule 40 conduit.



☐ **Mini Mount (MM-050)**



☐ **Versabox® (VB-050)**

A 1.5" (38 mm) brass cap with 1/2"-14 NPSM threads.



☐ **Mini J-Box (MJ-050)**

A 1.5" (38 mm) aluminum wall mount with 1/2"-14 NPSM threads and wire compartment.



☐ **Treebox® (TB)**

A dual 1/2"-14 NPSM threads with wire compartment.



☐ **Gutter Mount (GM-SS)**

A 4.4" (112 mm) aluminum cap with 1/2"-14 NPSM threads and wire compartment; 2.0" schedule 40 conduit.



☐ **Wall Plate 1-Gang (WP-1G-050)**

1-gang wall plate with 1/2"-14 NPSM threads.



☐ **Wall Plate, Round (WP-RD-050)**

5" (127 mm) round wall plate with 1/2"-14 NPSM threads.



☐ **Non-Penetrating Tree Ring (TR)**

Adjustable, drill-free, non-penetrating tree ring, accommodates up to six luminaires.



☐ **Line Mount (LNM)**

In-ground mounting accessory with cavity for mini transformers.



### Riser & Couplings

Specify Separately

☐ **Straight Riser (—)**

An aluminum straight riser with 0.8" (12 mm) OD and 1/2"-14 Male NPSM x2 threads.



☐ **Angled Sign-Light Riser (—)**

An aluminum angled sign-light riser with 0.8" (12 mm) OD, 45° bend, and 1/2"-14 NPSM x2 threads.



☐ **Straight Coupling (COUP)**

An aluminum straight coupling 1.3" (32 mm) x 2.0" (51 mm).



☐ **Coupling, 90-deg, 1/2" NPSM (ELBW-050)**

An aluminum 90° coupling 1.3" (32 mm) x 2.0" (51 mm).



☐ **Coupling, T, 1/2" NPSM (TMNT-050)**

An aluminum T Coupling, 1/2" NPSM Thread.



☐ **Copper Straight Riser (—)**

1.2" (30 mm) OD and 1/2"-14 Male and Female NPSM threads



## Power Supplies

Specify Separately

- ☐ **Multi-Tap Transformer (PROLINK)**  
The industry's most reliable multi-tap transformer.



- ☐ **ZDCLink® Lighting Controller (ZDCLink)**  
A combined lighting controller and transformer (120 Vac to 14 Vac) that offers powerline zoning, dimming, RGBW color changing, and optional Wi-Fi control via Luxor Technology™



- ☐ **Dimmable Mini Transformer (ST-120-DIM)**  
60 W, 120 V to 12 Vac step-down transformer.



- ☐ **Non-Dimmable Mini Transformer (ST-UV)**  
30 W universal voltage step-down transformer.



- ☐ **6 W Plug-in Transformer (MT-6W)**  
Standard North American Type A, Class 2 transformer with 6 W capacity and 1' (300 mm) flying leads.

- ☐ **30 W Plug-in Transformer (MT-30W)**  
Standard North American Type A, Class 2 transformer with 30 W capacity and 1' (300 mm) flying leads.

## Supplemental Surge Protection

Specify Separately

- ☐ **In-Line Surge Arrestor (SURGE-MOD)**  
Provides two additional layers of surge protection (up to 10KW) to any 12 Vac/dc LED luminaire.



## Wire Connections

Specify Separately

- ☐ **Heat Shrink Wire Connectors - Medium (WCHSMD20)**  
Tin-coated copper butt splices with adhesive-filled heat shrink tubes.



- ☐ **Heat Shrink Wire Connectors - Small (WCHSSM20)**  
Tin-coated copper butt splices with adhesive-filled heat shrink tubes.



Custom Color

A one-off setup fee applies for each custom color per order. Add to your enquiry.

- ☐ Custom Color Setup  
Fee: Essential  
Series (Custom RAL  
Color Setup)  
Custom RAL colour  
setup fee





# *Give every landscape* the light it deserves



When it comes to lighting design, why should architecture have all the fun? We've added more than 50 new landscape luminaires, offering unmatched performance, simple installation, and compatibility with state-of-the-art Luxor® Technology. Discover endless new possibilities to bring your next landscape lighting project to life at [lumascap.com](http://lumascap.com).



**ARCHITECTURAL & FACADE LIGHTING**  
Learn more. Visit [lumascap.com](http://lumascap.com)

 **LUMASCAPE**