








Project Name	
Type	
Part Number	
Quantity	
Notes	

Product Overview

A versatile, classic halogen directional luminaire.

Features

Total Lumens	337 lm
Power Consumption	4.3 W 5.4 W
Input Voltage	10-15 Vac/dc, 50/60 Hz
Lamp Type	MR-16
Installation Requirements	Upward Direction Only
Typical Lifetime	White: 72,000 hrs
Weight	1.8 lbs (0.8 kg)
Compliance	    RoHS COMPLIANT
Color Options	

Technology



Written Specifications

Electrical

Power Consumption	Specified power consumption indicates the full apparent power.
Input Voltage	10–15 Vac/dc, 50/60 Hz Remote transformer required (specify separately)
Lamp	MR-16
LED	Cree®
Thermal Management	CoolDrive™ onboard thermal monitoring and control.
Lifetime	White: >40,000 hours (L70, B10, TM21 Reported)
Dimming	Luxor® control or a trailing-edge (reverse phase-cut) dimmer.

Control

Luxor® Control	The ZDLink Controller utilizes Luxor Technology™ to zone luminaires in up to 250 groups, dim each group in 1% increments between 0% and 100%, or change to one of 30,000+ colors with RGBW LEDs. Select the ZD option for zoning/dimming or ZDC for zoning/dimming/color. Standard luminaire is zoneable with ZDLink.
----------------	---

Physical

Beam Angles	Dependent upon selected lamp
Construction	Die-cast A380 aluminum housing and shield with stainless steel hardware. Die-cast zinc/aluminum alloy knuckle.
Finish	Two-layer protection of marine-grade anodization and polyester TGIC powder-coat finish, providing superior outdoor weathering in all conditions. Tested to ASTM standards.
Installation	Designed for installation in the upward lighting direction only.
Installation Accessories (Included)	Item ships with the ProAim™ Adjustable Ratcheting Stake (PARS). Stake is 10" long, includes tamper resistant features, and is made from ABS.
Adjustability	Compress-and-lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical alignment.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length, measured from the light aperture. International ("e") length is shorter.
Socket	MR-16 GU5.3 socket with retaining clips. Ceramic socket base with heat-resistant contact pad. Stainless steel retaining clips ensure high spring force retention.
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C).
Lens	OptiClear™ tempered glass for exceptional optical purity and load strength.
Lens Transparency	Clear
Glare Control	15° angled shield or 45° long shield option.
Hardware	Brass and/or stainless steel hardware
Threads	1/2"-14 NPSM
Housing Capacity	Standard MR-16 lamp
Weight	1.8 lb (0.8 kg)

Compliance


IP Rating	IP65
Environment	Dry, Damp, Wet locations
Certifications	"UL 1838, CSA C22.2 No. 250.7, IEC 60598-1, IEC 605598-2-4, FCC Part 15, Subpart B, ISED Canada ICES-005, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3. Default configuration UL Listed. CE certification is met when the "e" option is selected."

Overview


About Us	Lumascape transforms spaces with precision-engineered lighting solutions, proven to perform. Since 1991, customers have relied on us as a leading manufacturer of high-quality, innovative luminaires that solve their toughest lighting challenges. Our global experts combine sophisticated design, advanced technologies, quality materials, and rigorous testing to manufacture a comprehensive range of lighting systems that consistently exceed performance expectations. Lumascape is a member of the Hunter Industries Family of Companies. Learn more at lumascape.com .
Manufacturing	ISO 9001:2015 certified facility.
Warranty	5-year limited warranty.

Specifications

Dimensions - Short Shroud

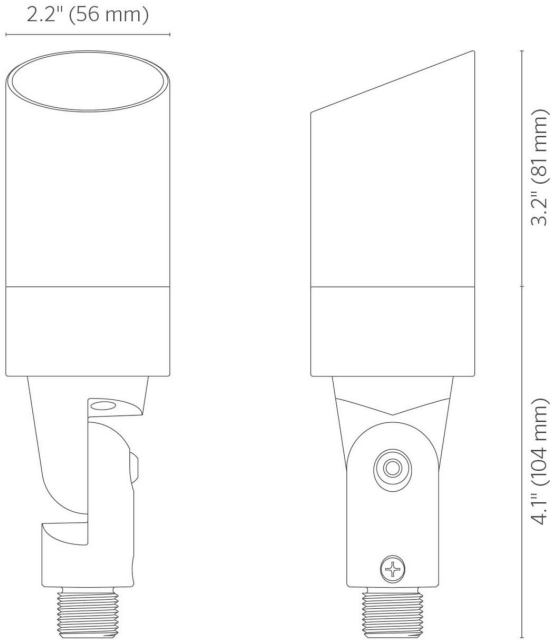

Dimensions - Long Shroud

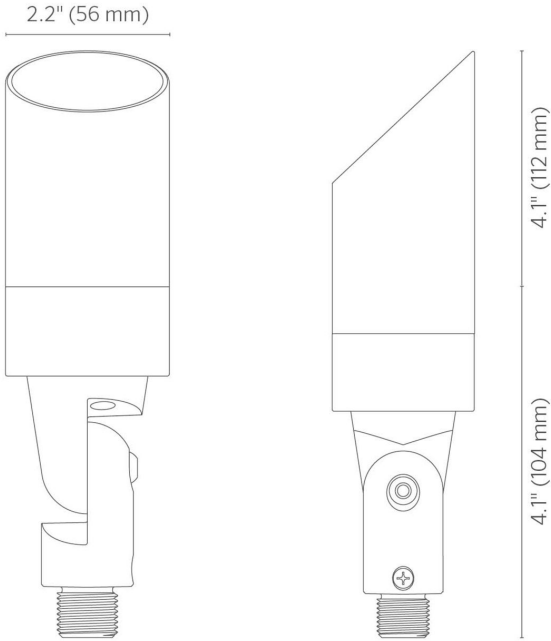

Photometrics ZDC35WFL

dTessa-6 ZD35WFL Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width
	Foot-Candles (Lux)	
3' (0.9 m)	93.8 fc (1,010 lx)	1.7' (0.5 m)
6' (1.8 m)	23.5 fc (253 lx)	3.4' (1.0 m)
9' (2.7 m)	10.4 fc (112 lx)	5.1' (1.6 m)
12' (3.7 m)	5.9 fc (64 lx)	6.8' (2.1 m)
15' (4.6 m)	3.8 fc (41 lx)	8.4' (2.6 m)
18' (5.5 m)	2.6 fc (28 lx)	10.1' (3.1 m)

Note: Photometric data displayed using 2,700 K lamp with a 35° beam angle.

Photometrics LED35WFL


dTessa-6 LED35WFL Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width
	Foot-Candles (Lux)	
3' (0.9 m)	93.8 fc (1,010 lx)	1.7' (0.5 m)
6' (1.8 m)	23.5 fc (253 lx)	3.4' (1.0 m)
9' (2.7 m)	10.4 fc (112 lx)	5.1' (1.6 m)
12' (3.7 m)	5.9 fc (64 lx)	6.8' (2.1 m)
15' (4.6 m)	3.8 fc (41 lx)	8.4' (2.6 m)
18' (5.5 m)	2.6 fc (28 lx)	10.1' (3.1 m)

Photometrics ZDC20WFL

dTessa-6 LED20WFL Illuminance at a Distance

Feet (Meters)	Center Beam Foot-Candles (Lux)	Beam Width Vertical 35°
3' (0.9 m)	84.0 fc (904 lx)	1.6' (0.5 m)
6' (1.8 m)	21.0 fc (226 lx)	3.2' (1.0 m)
9' (2.7 m)	9.3 fc (100 lx)	4.7' (1.4 m)
12' (3.7 m)	5.3 fc (57 lx)	6.3' (1.9 m)
15' (4.6 m)	3.4 fc (37 lx)	7.9' (2.4 m)
18' (5.5 m)	2.3 fc (25 lx)	9.5' (2.9 m)

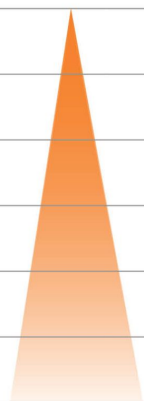

Configuration

For complete and up-to-date product options, configure the dTSA6 using our online [product configurator](#).

dTSA6							
Code	Control	Output	Light Source	Beam Angles	Compliance	Shielding	Mounting & Installation

Finish

Control

- Default (LED)**
1) On/Off or 2) Phase-cut Dimming
- Zone/Dim (ZD)**
Zone/Dim with Luxor® Technology using the ZDLink Lighting Controller.

Output

- 4.3 W (20)**
261 lm
- 5.4 W (35)**
337 lm

Light Source

- Static White (W)**
2,700 K (80+ CRI)



Beam Angles

Published angles may vary slightly to photometric data. Please refer to IES files where relevant.

- Flood (FL)**
35° beam angle

Compliance

- North America**
UL listed
- International (E)**
Bracket mount, UL listed and CE approved. Required for shipment outside of North America



Shielding

- Standard Shroud**
 15° Angled Shroud
- Long Shroud (LS)**
 45° Angled Long Shroud











Mounting & Installation

Included with product.

- ProAim™ Ratcheting Stake**
 10" (250 mm) adjustable stake for ½"-14 NPSM threads















Finish

- | | | | | | |
|---|---|---|---|--|---|
| <input type="checkbox"/> Black (BL)
RAL9004 from RAL Classic collection |  | <input type="checkbox"/> Anthracite Gray (AG)
RAL7016 from RAL Classic collection |  | <input type="checkbox"/> Basalt Gray (BT)
RAL7012 from RAL Classic collection |  |
| <input type="checkbox"/> Graphite Gray (GH)
Graphite Gray powder-coat finish |  | <input type="checkbox"/> Anodic Silver (SL)
RAL9006 from RAL Classic collection |  | <input type="checkbox"/> White (WT)
RAL9016 from RAL Classic collection |  |
| <input type="checkbox"/> Dark Bronze (DB)
RAL8019 from RAL Classic collection |  | <input type="checkbox"/> Latte (LT)
RAL7006 from RAL Classic collection |  | <input type="checkbox"/> Dark Aluminium (DA)
RAL9007 from RAL Classic collection |  |
| <input type="checkbox"/> Custom RAL (CC)
A one-off custom color setup fee applies. Click on 'More Info' button to add to your enquiry. Contact Lumascape for volume discount on set-up fee. |  | | | | |

Accessories






Mounting & Installation

Specify Separately

- | | | | | | |
|---|---|--|---|---|---|
| <input type="checkbox"/> Non-Penetrating Tree Ring (TR)
Adjustable, drill-free, non-penetrating tree ring, accommodates up to six luminaires. |  | <input type="checkbox"/> Super J-Box Stake (SJ)
2.0" (51 mm) metal cap with 1/2"-14 NPSM threads over an 11" (279 mm) ground stake. |  | <input type="checkbox"/> Post Mount (PM)
Suitable for use on 1/2" NPSM ground-mount luminaires and is specified separately. |  |
| <input type="checkbox"/> Ground Mount (GM)
The Ground Mount is a 4.4" (112 mm) aluminum cap with 1/2"-14 NPSM threads and wire compartment; 2.0" schedule 40 conduit. |  | <input type="checkbox"/> Versabox® (VB-050)
A 1.5" (38 mm) brass cap with 1/2"-14 NPSM threads. |  | <input type="checkbox"/> Mini J-Box (MJ-050)
A 1.5" (38 mm) aluminum wall mount with 1/2"-14 NPSM threads and wire compartment. |  |
| <input type="checkbox"/> Treebox® (TB)
A dual 1/2"-14 NPSM threads with wire compartment. |  | <input type="checkbox"/> Gutter Mount (GM-SS)
A 4.4" (112 mm) aluminum cap with 1/2"-14 NPSM threads and wire compartment; 2.0" schedule 40 conduit. |  | <input type="checkbox"/> Wall Plate 1-Gang (WP-1G-050)
1-gang wall plate with 1/2"-14 NPSM threads. |  |
| <input type="checkbox"/> Wall Plate, Round (WP-RD-050)
5" (127 mm) round wall plate with 1/2"-14 NPSM threads. |  | <input type="checkbox"/> Mini Mount (MM-050) |  | <input type="checkbox"/> Line Mount (LNM)
In-ground mounting accessory with cavity for mini transformers. |  |

Risers & Couplings

Specify Separately. Configure product in the enquiry.

- | | | | | | |
|---|--|---|--|--|---|
| <input type="checkbox"/> Straight Riser (—)
An aluminum straight riser with 0.8" (12 mm) OD and 1/2"-14 Male NPSM x2 threads. |  | <input type="checkbox"/> Angled Sign-Light Riser (↘)
An aluminum angled sign-light riser with 0.8" (12 mm) OD, 45° bend, and 1/2"-14 NPSM x2 threads. |  | <input type="checkbox"/> Straight Coupling (COUP)
An aluminum straight coupling 1.3" (32 mm) x 2.0" (51 mm). |  |
| <input type="checkbox"/> Coupling, 90-deg, 1/2" NPSM (ELBW-050)
An aluminum 90° coupling 1.3" (32 mm) x 2.0" (51 mm). |  | <input type="checkbox"/> Coupling, T, 1/2" NPSM (TMNT-050)
An aluminum T Coupling, 1/2" NPSM Thread. |  | | |

Lens Accessories

Specify Separately

- Hex Baffle (250015260000)**
2" (50 mm) diameter (MR-16)



- Linear Spread Lens (250013550000)**
2" (50 mm) diameter (MR-16)



- Solite Spread Lens (250015240000)**
2" (50 mm) diameter (MR-16)



- RecessorRing® (RR-MR16)**
Spacer pushes the lamp farther into the fixture body to reduce glare.



Power Supplies

Specify Separately

- Multi-Tap Transformer (PROLINK)**
The industry's most reliable multi-tap transformer.



- ZDclick® Lighting Controller (ZDclick)**
A combined lighting controller and transformer (120 Vac to 14 Vac) that offers powerline zoning, dimming, RGBW color changing, and optional Wi-Fi control via Luxor Technology™



- Dimmable Mini Transformer (ST-120-DIM)**
60 W, 120 V to 12 Vac step-down transformer.



- Non-Dimmable Mini Transformer (ST-UV)**
30 W universal voltage step-down transformer.



- 6 W Plug-in Transformer (MT-6W)**
Standard North American Type A, Class 2 transformer with 6 W capacity and 1' (300 mm) flying leads.

- 30 W Plug-in Transformer (MT-30W)**
Standard North American Type A, Class 2 transformer with 30 W capacity and 1' (300 mm) flying leads.

Supplemental Surge Protection

Specify Separately

- In-Line Surge Arrestor (SURGE-MOD)**
Provides two additional layers of surge protection (up to 10KW) to any 12 Vac/dc LED luminaire.



Wire Connections

Specify Separately

- Heat Shrink Wire Connectors - Medium (WCHSMD20)**

Tin-coated copper butt splices with adhesive-filled heat shrink tubes.



- Heat Shrink Wire Connectors - Small (WCHSSM20)**

Tin-coated copper butt splices with adhesive-filled heat shrink tubes.



Custom Color

A one-off setup fee applies for each custom color per order. Add to your enquiry.

- Custom Color Setup Fee: Essential Series (Custom RAL Color Setup)**

Custom RAL colour setup fee



Give every landscape the light it deserves



When it comes to lighting design, why should architecture have all the fun? We've added more than 50 new landscape luminaires, offering unmatched performance, simple installation, and compatibility with state-of-the-art Luxor® Technology. Discover endless new possibilities to bring your next landscape lighting project to life at lumascap.com.



ARCHITECTURAL & FACADE LIGHTING
Learn more. Visit lumascap.com

 **LUMASCOPE**