









Project Name	
Type	
Part Number	
Quantity	
Notes	

## Product Overview

The Reed RD2 is a recessed wall luminaire with a slim, vertical rectangular profile. It provides over 200 delivered lumens in a forward throw distribution with a medium narrow beam. Multiple fittings can be used to effectively illuminate wide pathways, stairways and cycleways.

## Features


Lumen Output	215 lm
Power Consumption	< 9 W
Typical Lifetime	> 60,000 hrs (B10, L70, TM21 Reported)
Input Voltage	International: 220-240 Vac, 50 Hz   North America: 120/277 Vac, 60 Hz
Control Protocols	DALI, 0-10 V
Weight	1.2 lb (0.5 kg)
IP Rating	IP66/67
IK Rating	IK9
BUG Rating	B0-U2-G1
Compliance	   
Color Options	 

## Specifications

Hero - LS1252



## Dimensions - LS1252

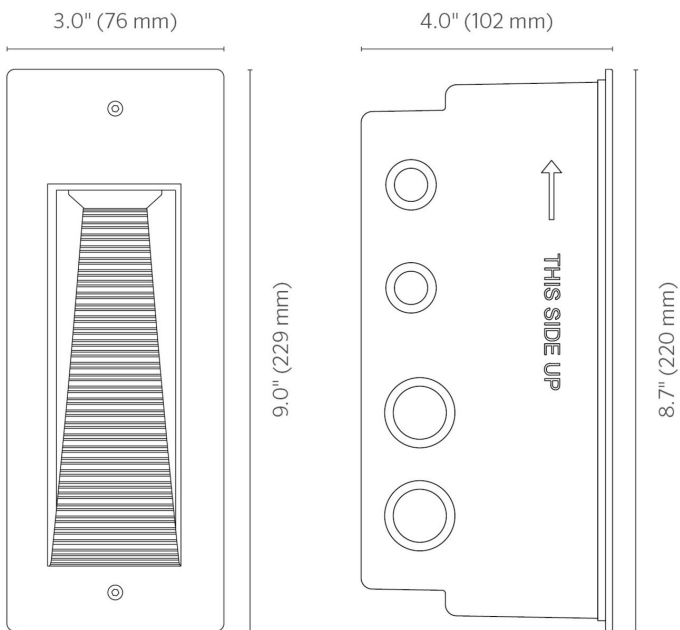

## Configuration

For complete and up-to-date product options, configure the LS1252 using our online [product configurator](#).




LS1252							
Code	Power Consumption	Light Source	Style	Beam Angles	Input Voltage	Control	Finish

### Power Consumption

For all PowerSync Controlled Luminaires

- 9 W (09D)**  
9 W

### Light Source


- Static White (827)**  
2,700 K (80 CRI, 3 SDCM) 
- Static White (830)**  
3,000K (80 CRI, 3 SDCM) 
- Static White (840)**  
4,000 K (80 CRI, 3 SDCM) 

### Style


- Recessed Baffle (RB)**  
Recessed Baffle

### Beam Angles

Published angles may vary slightly to photometric data. Please refer to IES files where relevant.

- Medium Throw (MD)**  
50° x 30° 

### Input Voltage











- 120/277 Vac, 60 Hz (09)**  
Line Voltage 

## Control

- 0-10 V (AH)**  
For single color dimming applications via 0-10 V.

## Finish

Custom powder coat colours are available. Please consult factory.

- |   |   |   |   |  |   |
|---|---|---|---|--|---|
| <input type="checkbox"/> <b>Black (BL)</b><br>RAL9004 from RAL Classic collection (formerly CB)   |    | <input type="checkbox"/> <b>Anthracite Gray (AG)</b><br>RAL7016 from RAL Classic collection             |  | <input type="checkbox"/> <b>Basalt Gray (BT)</b><br>RAL7012 from RAL Classic collection    |  |
| <input type="checkbox"/> <b>Graphite Gray (GH)</b><br>Graphite Gray   |    | <input type="checkbox"/> <b>Anodic Silver (SL)</b><br>RAL9006 from RAL Classic collection (formerly CS) |  | <input type="checkbox"/> <b>White (WT)</b><br>RAL9016 from RAL Classic collection          |  |
| <input type="checkbox"/> <b>Dark Bronze (DB)</b><br>RAL8019 from RAL Classic collection   |    | <input type="checkbox"/> <b>Latte (LT)</b><br>RAL7006 from RAL Classic collection                       |  | <input type="checkbox"/> <b>Dark Aluminium (DA)</b><br>RAL9007 from RAL Classic collection |  |
| <input type="checkbox"/> <b>Custom RAL (CC)</b><br>A one-off custom color setup fee applies. Click on 'More Info' button to add to your enquiry. Contact Lumascape for volume discount on set-up fee. |  |   |   |  |   |

## Accessories

### Required Pre-Installation Kit

Specify Separately

- Pre-Installation Kit (LS6335)**  
Required pre-installation kit used for mounting the Reed RD2 on any flat surface.



---

### Custom Color

A one-off setup fee applies for each custom color per order. Add to your enquiry.

- Custom Color Setup Fee (Custom RAL Color)**  
Custom RAL colour setup fee

